6(b) - RF Troubleshooting and Manual Tuning Guide

Copyright © 2003 Nokia. All Rights Reserved.

This page has been deliberately left blank

Copyright © 2003 Nokia. All Rights Reserved.

Table of Contents

Page No

Introduction 5
General troubleshooting 6
RF Key Component Placement 7
Receiver Troubleshooting 9
General Description 9
General Instructions for RX Troubleshooting 10
Measuring RX I/Q signals using RSSI 10
Measuring RX performance using SNR measurement 11
Measuring the RX module manually using Oscilloscope and Spectrum Analyzer 12
GSM900 12
GSM1800 14
GSM1900 15
Measurement points in the Receiver 17
Tuning of the RX Using Phoenix 19
RX Channel Select Filter Calibration 19
RX Calibration 19
RX Band Filter Response Compensation 22
Transmitter Troubleshooting 25
General Description 25
Preparation for Fault Finding 26
Fault-finding chart: TX-BB interface and control signals 28
Fault-finding chart: RF side of transmitter 29
Transmitter Tuning 30
Introduction 30
TX IQ Tuning 30
TX Power Level Tuning 34

Copyright © 2003 Nokia. All Rights Reserved.

This page has been deliberately left blank

Copyright © 2003 Nokia. All Rights Reserved.

Introduction

This document describes the troubleshooting and RF tuning of Nokia 6600 (NHL-10). In general, two types of measurements have to be performed during the troubleshooting and repair of phones:

- RF measurements shall be done with a spectrum analyzer, either connected directly to the RF connector of the board ("antenna point"), or used together with a high-frequency probe to measure RF signals at points along the TX or RX chain.
- LF (Low-Frequency) and DC measurements shall be done either with a multimeter, or with an oscilloscope together with a 10:1 probe.

All tuning must be done with Phoenix Service Software, version A9 2003.15.2.25, or later.

Always make sure that the measurement set-up has been calibrated when measuring RF parameters at the RF connector. Remember to include the correct losses in the module repair jig and the connecting cable when realigning the phone.

Most RF semiconductors are static discharge sensitive. ESD protection must be taken into account during repair (ground straps and ESD soldering irons).

Mjølner RF ASIC is moisture sensitive. Therefore, Mjølner RF ASIC must be pre-baked prior to soldering.

RF calibration done via Phoenix software is temperature sensitive because of calibration of 26MHz reference oscillator (VCXO). According to the Mjølner specification, ambient temperature has to be in the range of 22 to 36^{o}C.

Copyright © 2003 Nokia. All Rights Reserved.

General troubleshooting

The first step of fault-finding should always be a visual inspection. Carefully inspect the RF area using a microscope and look for cracks, solder bridges, dry joints, missing components, components that have partially come off and other anomalies. Capacitors can be checked to see that they are not short-circuited, and inductors that they are not open circuits. Also check that power supply lines are not short-circuited, i.e. not 0Ω to ground.

Instruments needed for trouble-shooting (minimum requirement):

- Oscilloscope
- Multimeter
- Spectrum analyzer (SA)

Note:
Use an attenuator at the spectrum analyzer input to ensure that the SA will not become damaged by excessive input power from the phone. Check the spectrum analyzer for maximum allowable input power.

- Power supply that can deliver at least 2Adc
- Nokia 6600 module jig (also called test jig)
- PC with Phoenix installed

Note:
In this text the following terms are used interchangeably:
GSM900 = EGSM900 = EGSM
GSM1800 = DCS band
GSM1900 = PCS band

Copyright © 2003 Nokia. All Rights Reserved.

RF Key Component Placement

The following figure shows the key components of the RF section.

Figure 1: RF Key Components

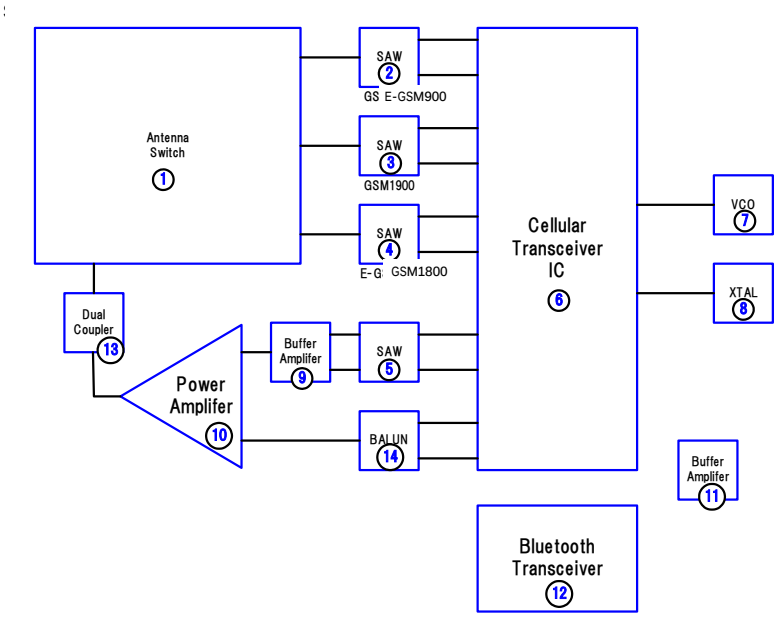

Figure 2: RF Key Components

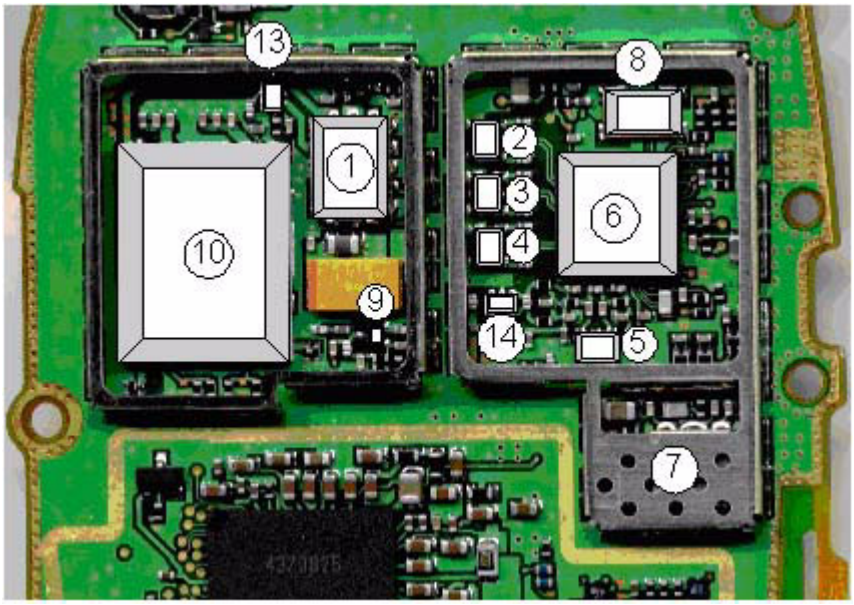

Copyright © 2003 Nokia. All Rights Reserved.

Figure 3: RF Key Components

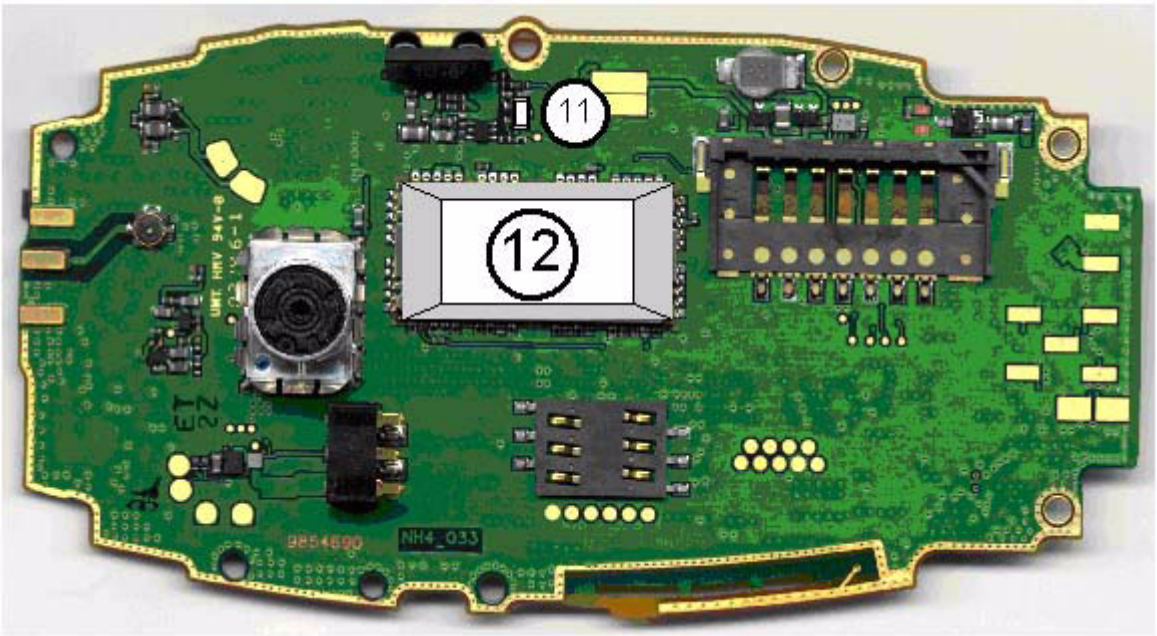

Copyright © 2003 Nokia. All Rights Reserved.

Receiver Troubleshooting

General Description

Figure 4: Receiver Signal Path

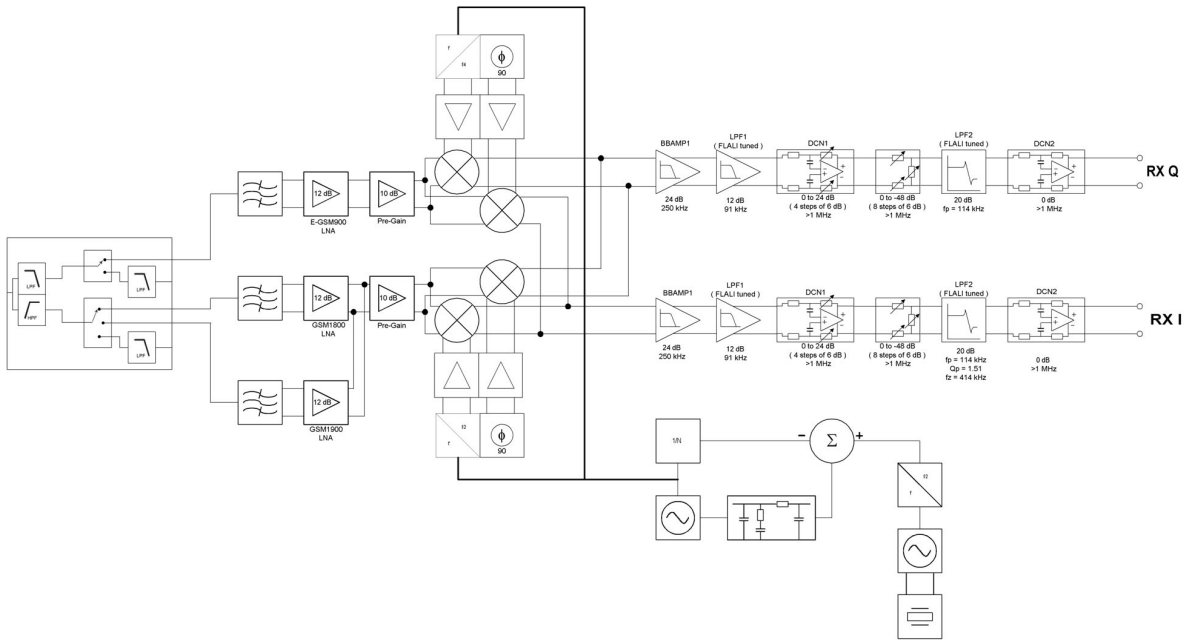

The receiver is a direct conversion, triple-band linear receiver. NHL-10 uses Mjølner RFIC with external VCO.

The received RF signal from the antenna/RF connector goes into the RF antenna switch where the signal is fed to the E-GSM900, GSM1800 or GSM1900 path. For each band, a RX band-pass SAW filter with unbalanced input and balanced output follows. All blocks are specified as 50Ω single ended, only the SAW filter output to the Mjølner input is differentially matched to LNA G_{opt}. The LNAs are integrated in Mjølner and have two gain levels. The first one is max. gain nominally 12 dB, the second one is about 30 dB below max. gain. The gain selection control of the LNAs is done via the serial interface.

The differential RX signals are further amplified in the “pre-gain” stage and then mixed down to baseband inside Mjølner using two Mixers with a 90° phase shift in the LO signal resulting in an in- and quadrature phase paths. Local oscillator signal is generated with the external VCO. The VCO signal is buffered and divided by 2 (DCS/PCS) or by 4 (EGSM). Accurate phasing is generated in LO dividers.

The Rx BB chain incorporates AGC, channel select filter and DC compensation. The AGC is adjusted in 6 dB steps in Mjølner. The DCN1 gain can be adjusted to +24/+18/+12/+6/0 dB. The attenuator gain can step from 0/-6/-12/-18/-24/-30/-36/-42/-48dB. Other BB amplifiers have a nominal summed gain of 58dB. The total dynamic range of AGC alone is 72dB. The 3rd order active channel filters in Mjølner defines the channel selectivity (flat response up to +/-90kHz typical). Integrated base band filters are based on active RC filters with on-chip capacitors. The baseband filters are distributed to following stages: BBAMP1, LPF1, LPF2. DC compensation is split to DCN1 and DCN2. DCN1 is used to compensate DC offset from RF front-end imper-

Copyright © 2003 Nokia. All Rights Reserved.

fections. DCN2 centres the differential signal with respect to the common mode reference voltage of 1.35V. Differential, filtered I/Q-signals are finally fed to the sigma-delta ADC's in the UEM. Further filtering in the digital domain occurs in the sinc decimation filter and DSP based FIR filters

General Instructions for RX Troubleshooting

Connect the phone to a PC with DAU-9S cable and dongle and follow the following instructions.

Measuring RX I/Q signals using RSSI

- Start Phoenix Service Software and establish a connection to the phone.
- Select File -> Scan Product Ctrl R.
- Wait until the phone software version is shown in the lower part of the screen.
- Select Testing -> RF controls.
- Select Band -> GSM900/GSM1800/GSM1900.
- Active unit -> RX.
- Operation mode -> Burst.
- RX/TX channel -> 37/700/661.
- Select RF Alt-M
  Testing -> T
  RSSI -> R

The set-up now looks like this:

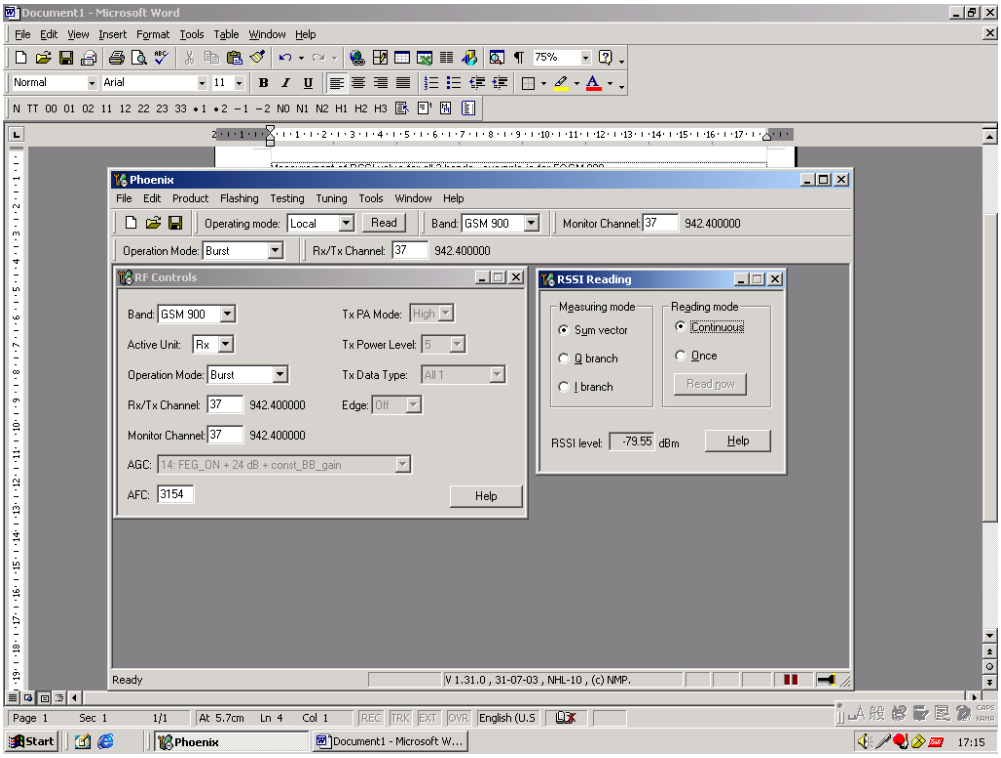

COMPANY CONFIDENTIAL
Copyright © 2003 Nokia. All Rights Reserved.

- Apply a signal with frequency of:
  EGSM: 942.467MHz (channel 37 + 67.710KHz offset),
  GSM1800: 1842.867MHz (channel 700 + 67.710KHz offset),
  GSM1900: 1960.067MHz (channel 661 + 67.710KHz offset),
  and a power level of –80dBm to the RF connector (remember to compensate for the cable loss).
- In RSSI reading click Read now.

The resulting RSSI level should be –80dBm in each band.

Measuring RX performance using SNR measurement

Note: This measurement also provides an indication of the conducted sensitivity.

- Start Phoenix Service Software and establish a connection to the phone.
- Select File -> Scan Product Ctrl R.
- Wait until the phone software version is shown in the lower part of the screen.
- Select Testing -> RF controls.
- Select Band -> GSM900/GSM1800/GSM1900.
- Active unit -> RX.
- Operation mode -> Burst.
- RX/TX channel -> 37/700/661.
- Select Maintenance Alt-M
  Testing -> T
  SNR Measurement -> M
- Select Fast SNR.
- Choose the respective band (EGSM900, GSM1800, GSM1900).
- Press Measure.
- Follow the instructions for Signal generator set–up in the pop–up window.
- Press OK.
- Read the SNR result. The SNR should be: EGSM900: > 20dB
  GSM1800: > 18dB
  GSM1900: > 18dB
- Check the sensitivity value.

The set-up should now look as shown in the following figure. The icon also includes a pop-up window for reference.

Copyright © 2003 Nokia. All Rights Reserved.

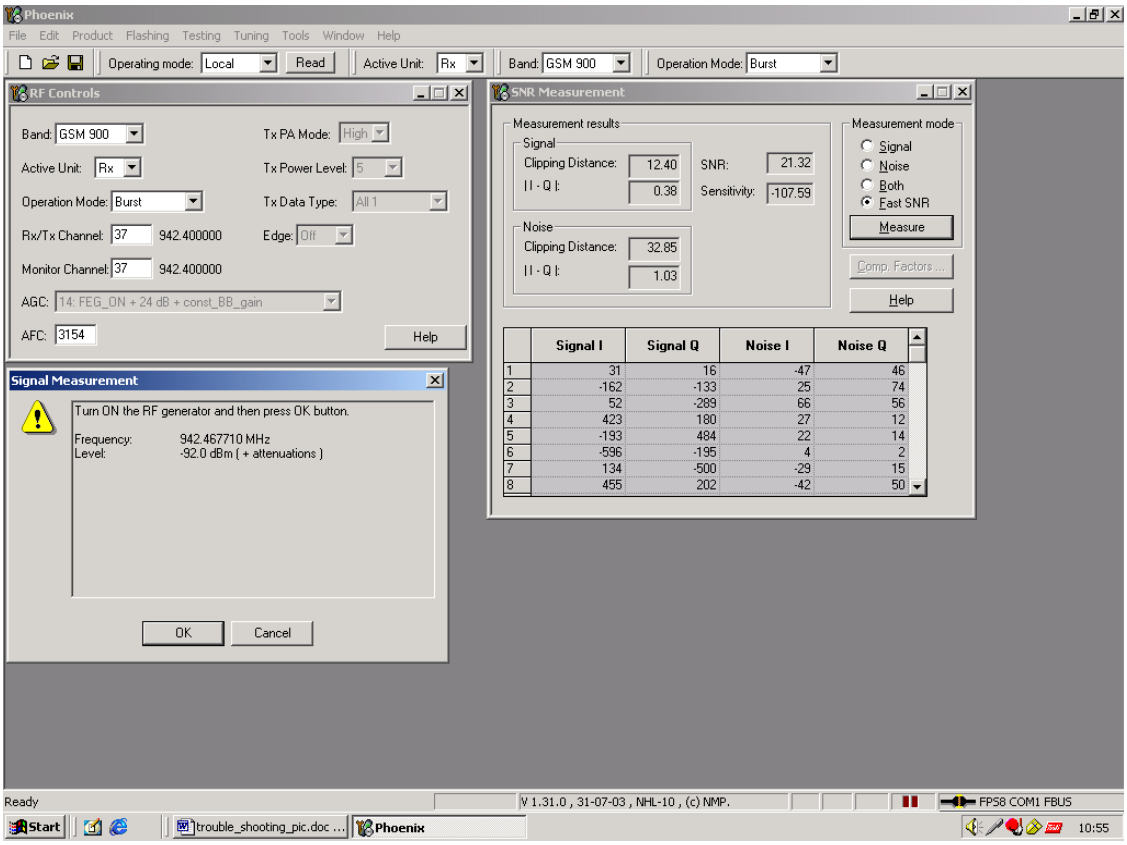

Measuring the RX module manually using Oscilloscope and Spectrum Analyzer

Spectrum Analyzer level values depend on the probe type and should be validated using a known good NHL-10 sample. The levels that are given here are measured using a high frequency probe.

Measuring with Oscilloscope on RXINN or RXQINN (J606 –608) and RXID or RXQD (J211 – J212) is recommended only if RSSI reading does not provide enough information. No dedicated test points exist for RX I/Q signals, however, they can be accessed by probing on a via hole plating.

GSM900

- Start Phoenix Service Software and establish a connection to the phone.
- Select File -> Scan Product Ctrl R.
- Wait until the phone software version is shown in the lower part of the screen.
- Select Testing -> RF controls.
- Select Band -> GSM900.
- Active unit -> RX.
- Operation mode -> Continuous.
- RX/TX channel -> 7.
- AGC -> 9.

Copyright © 2003 Nokia. All Rights Reserved.

The input freq/level of the signal generator is 942.467710MHz, -60dBm.

Figure 5: Fault finding chart for GSM900

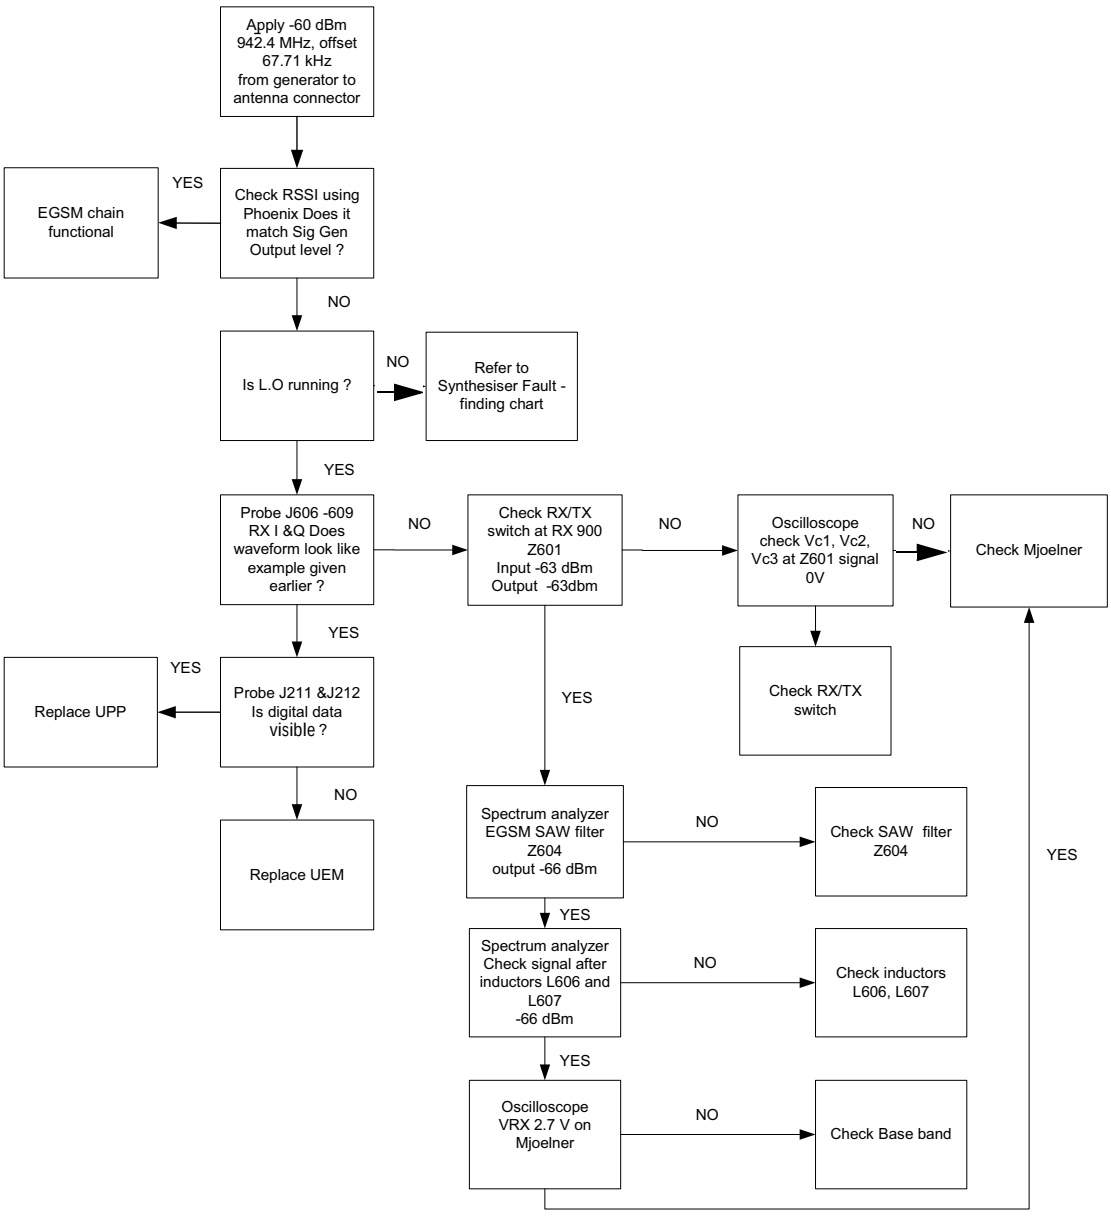

Copyright © 2003 Nokia. All Rights Reserved.

Probed RX I/Q signals J606 - 609 with signal setting to 942.467710MHz, -60dBm. Note that the display is the same for both GSM1800/1900 bands as well.

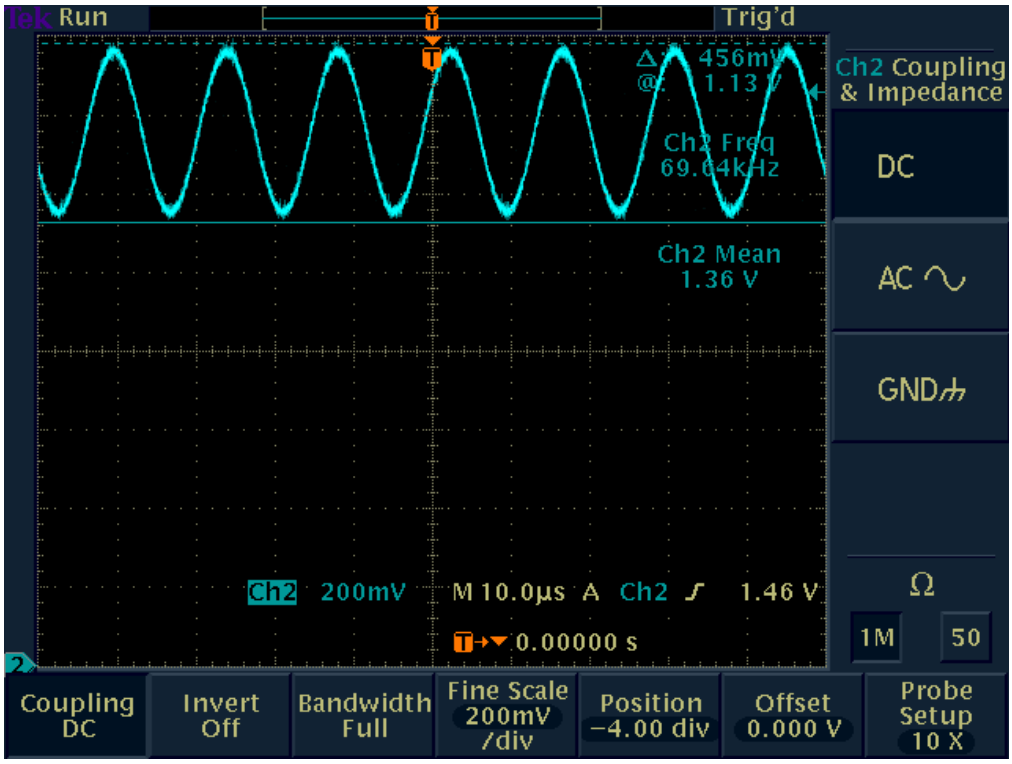

- Signal amplitude: 456mV
- DC offset: 1.36V
- Frequency: approx 67KHz

GSM1800

- Start Phoenix Service Software and establish a connection to the phone.
- Select File -> Scan Product Ctrl R.
- Wait until the phone software version is shown in the lower part of the screen.
- Select Testing -> RF controls.
- Select Band -> GSM1800.
- Active unit -> RX.
- Operation mode -> Continuous.
- RX/TX channel -> 700.
- AGC -> 9.

The input freq/level of the signal generator is 1842.867710MHz, -60dBm.

Copyright © 2003 Nokia. All Rights Reserved.

Figure 6: Fault finding chart for GSM1800

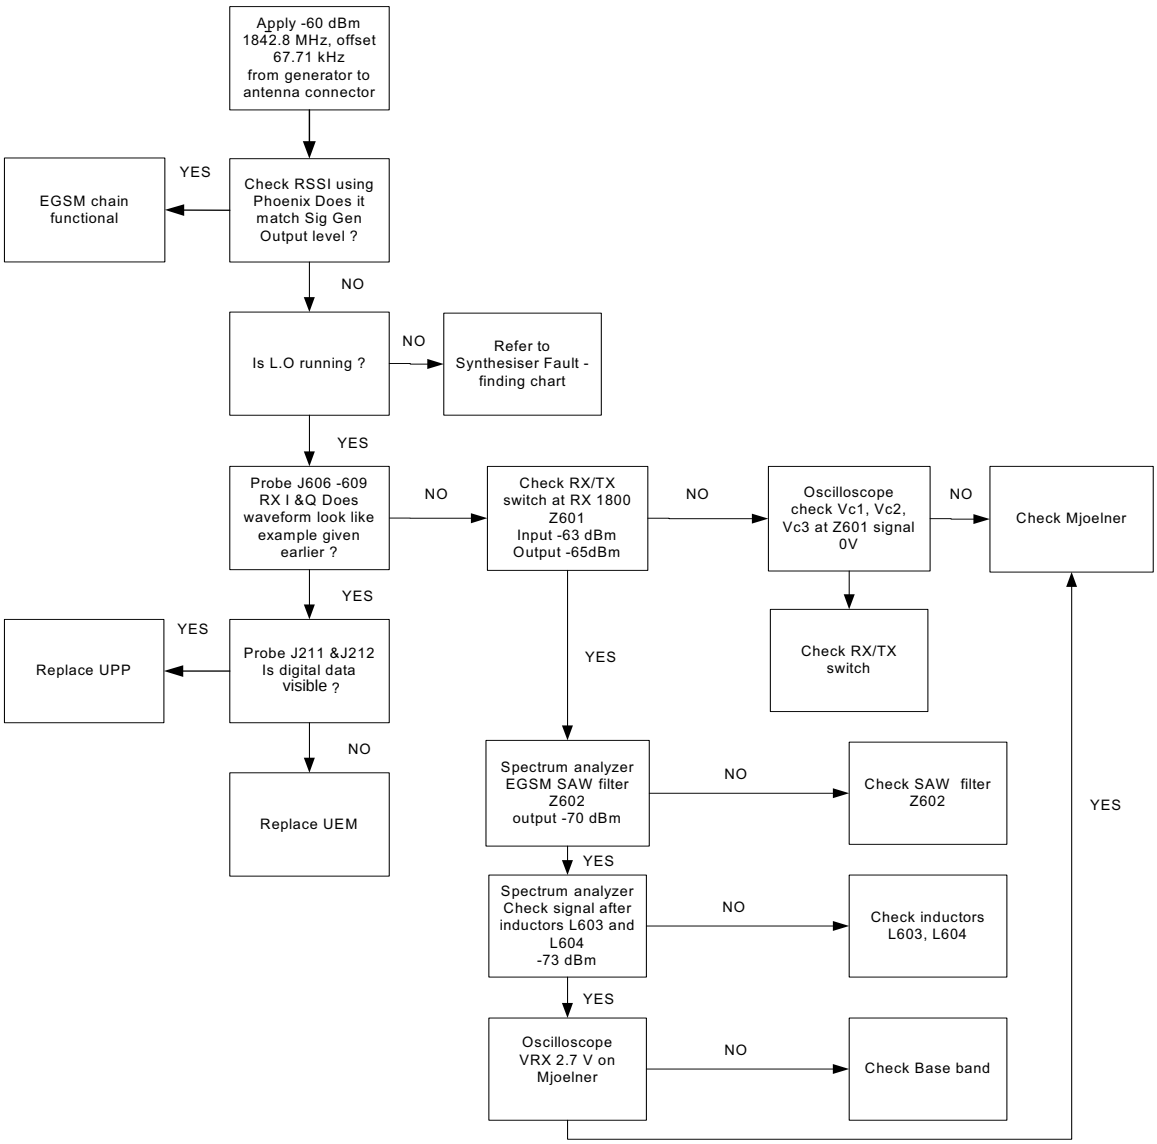

GSM1900

- Start Phoenix Service Software and establish a connection to the phone.
- Select File -> Scan Product Ctrl R.
- Wait until the phone software version is shown in the lower part of the screen.
- Select Testing -> RF controls.
- Select Band -> GSM1900.
- Active unit -> RX.
- Operation mode -> Continuous.
- RX/TX channel -> 661.
- AGC -> 9.

Copyright © 2003 Nokia. All Rights Reserved.

The input freq/level of signal generator is 1960.067710MHz, -60dBm

Figure 7: Fault finding chart for GSM1900

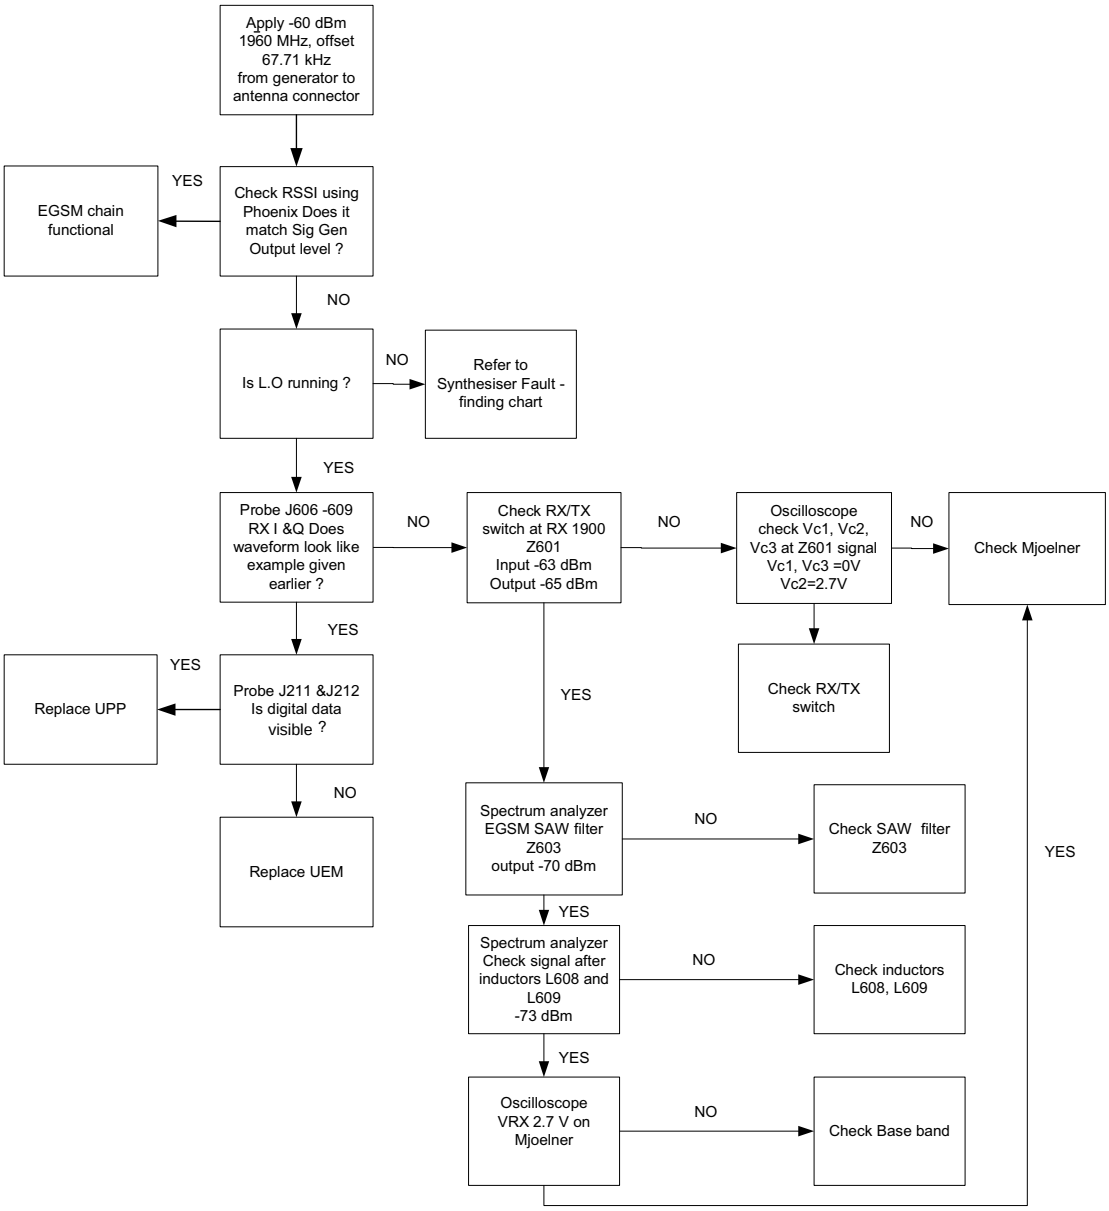
Apply -60 dBm 1960 MHz, offset 67.71 kHz from generator to antenna connector
Check RSSI using Phoenix Does it match Sig Gen Output level ?
YES
EGSM chain functional
NO
Is L.O running ?
NO
Refer to Synthesiser Fault - finding chart
YES
Probe J606 -609 RX I &Q Does waveform look like example given earlier ?
NO
Check RX/TX switch at RX 1900 Z601 Input -63 dBm Output -65 dBm
NO
Oscilloscope check Vc1, Vc2, Vc3 at Z601 signal Vc1, Vc3 =0V Vc2=2.7V
NO
Check Mjoelner
YES
Probe J211 &J212 Is digital data visible ?
YES
Replace UPP
NO
Replace UEM
Check RX/TX switch
YES
Spectrum analyzer EGSM SAW filter Z603 output -70 dBm
NO
Check SAW filter Z603
YES
Spectrum analyzer Check signal after inductors L608 and L609 -73 dBm
NO
Check inductors L608, L609
YES
Oscilloscope VRX 2.7 V on Mjoelner
NO
Check Base band
YES

Copyright © 2003 Nokia. All Rights Reserved.

Measurement points in the Receiver

Figure 8: Measurement points at the RX SAW filters –Z602, Z603, Z604

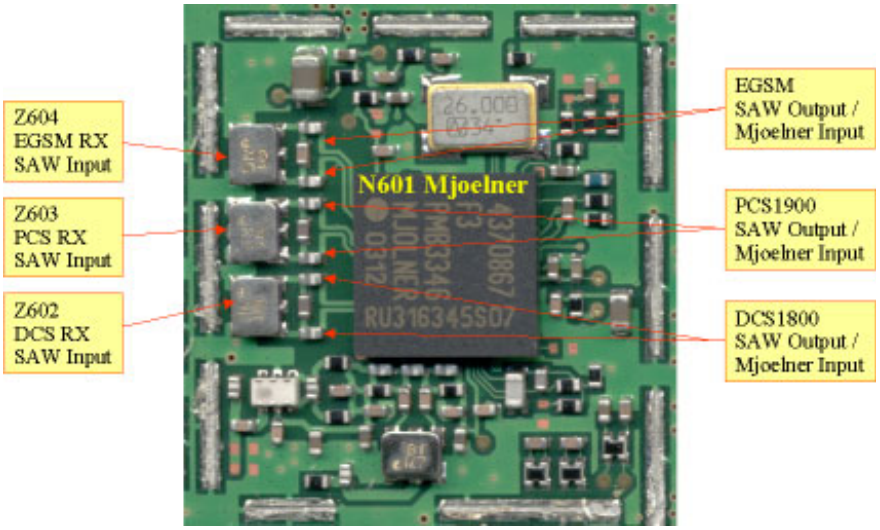

Figure 9: Measurement points for I/Q baseband signals

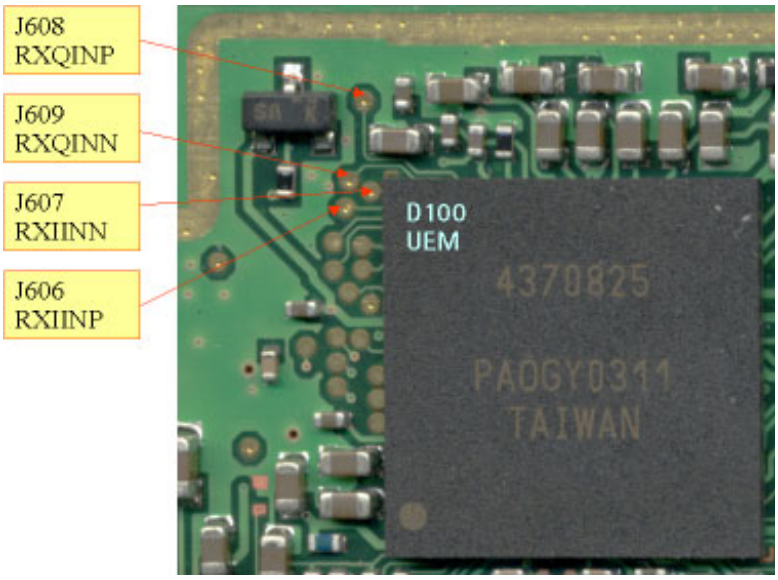

Copyright © 2003 Nokia. All Rights Reserved.

Figure 10: Measurement points for RX I/Q digital signals

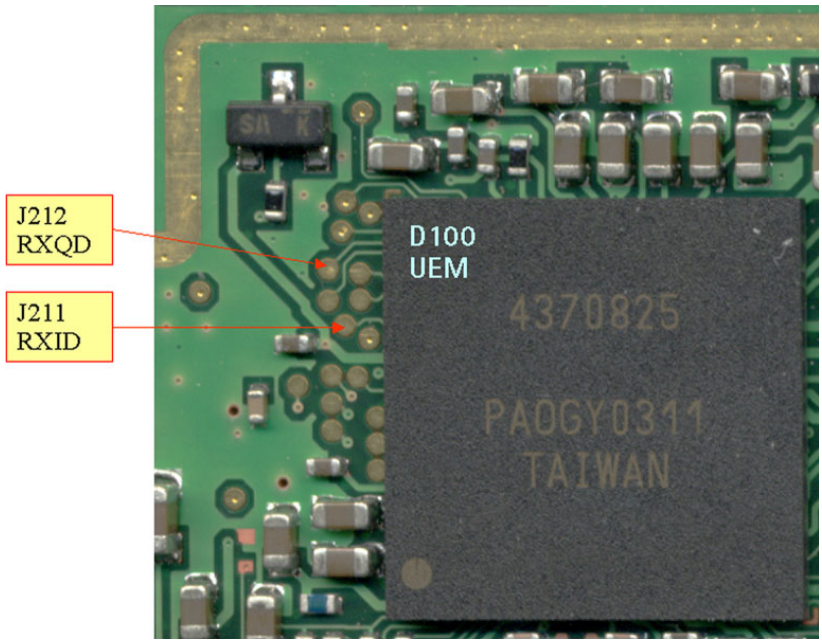

Figure 11: Measurement points at the Antenna switch

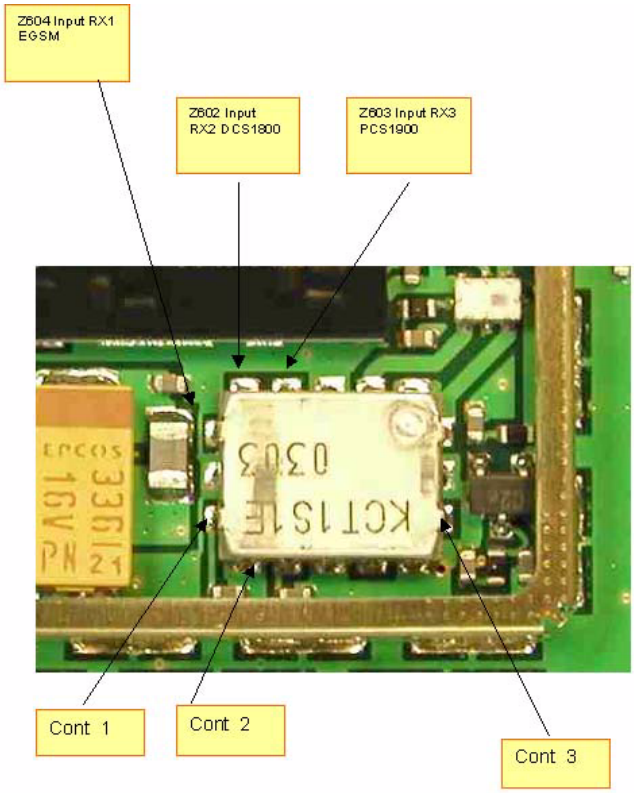

Copyright © 2003 Nokia. All Rights Reserved.

Tuning of the RX Using Phoenix

RX Channel Select Filter Calibration

This calibration is calibrating the Baseband filter inside Mjølner ASIC. It is done by internally measuring a prototype filter, for this reason the calibration is done once, not separately for all three bands.

- Select Tuning -> RX Channel Select Filter Calibration.

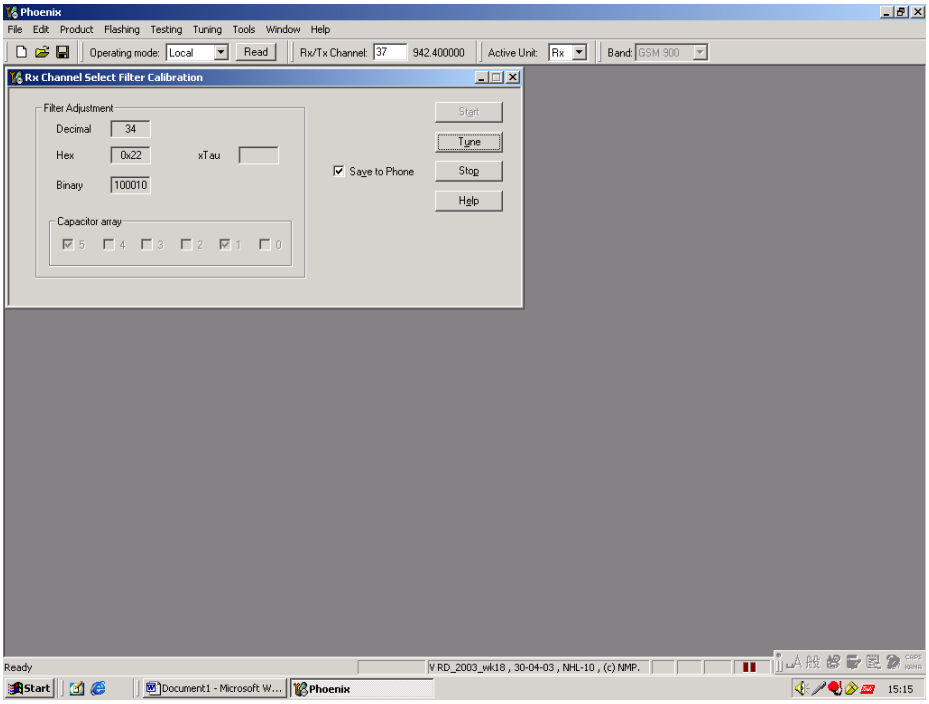

- Press Tune.

RX channel select filter calibration is finished.

RX Calibration

The RX Calibration is used to determine the gain at different gain settings for the front-end and the Mjølner ASIC and needs to be done in all three bands.

RX-calibration requires an external signal generator.

- Select Tuning -> RX calibration.
- Select band: GSM900.

Copyright © 2003 Nokia. All Rights Reserved.

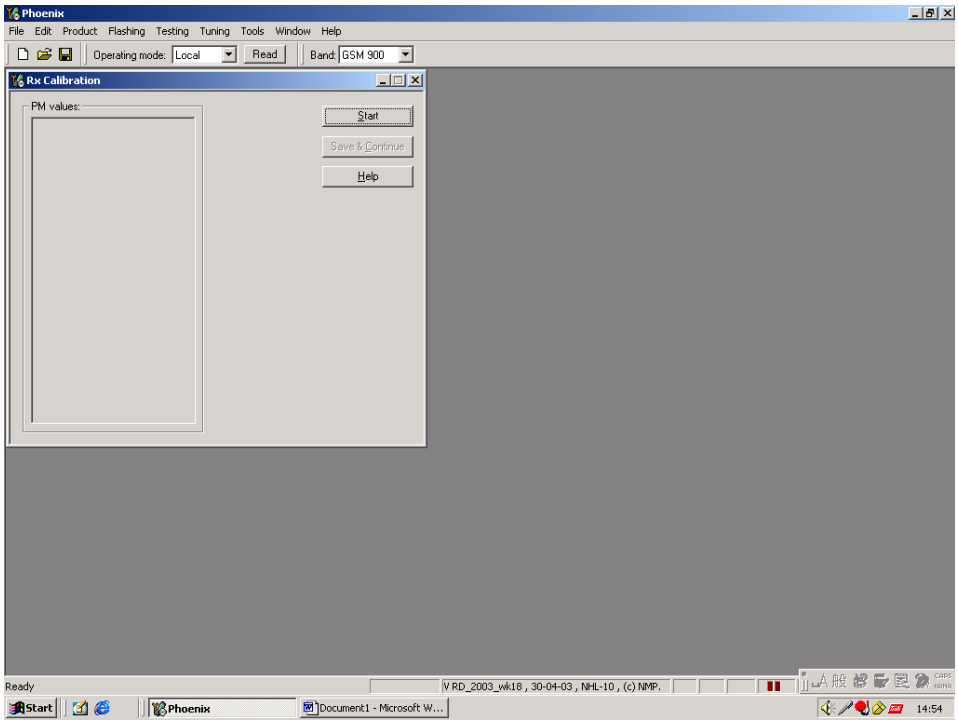

- Press **Start**.

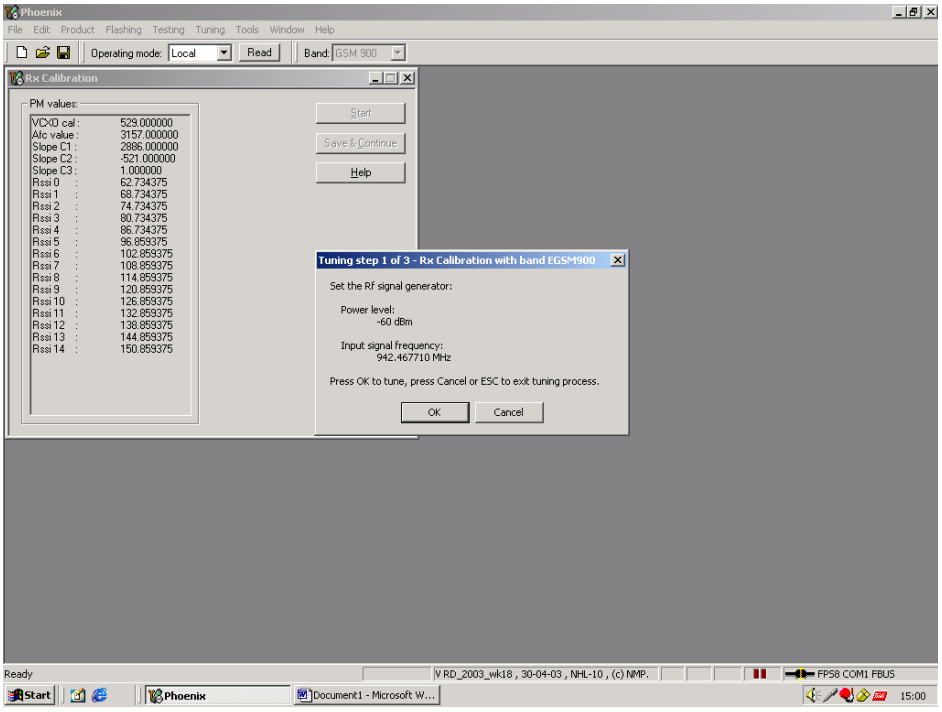

- Follow the instructions in the pop–up window.
- Press **OK**.

Copyright © 2003 Nokia. All Rights Reserved.

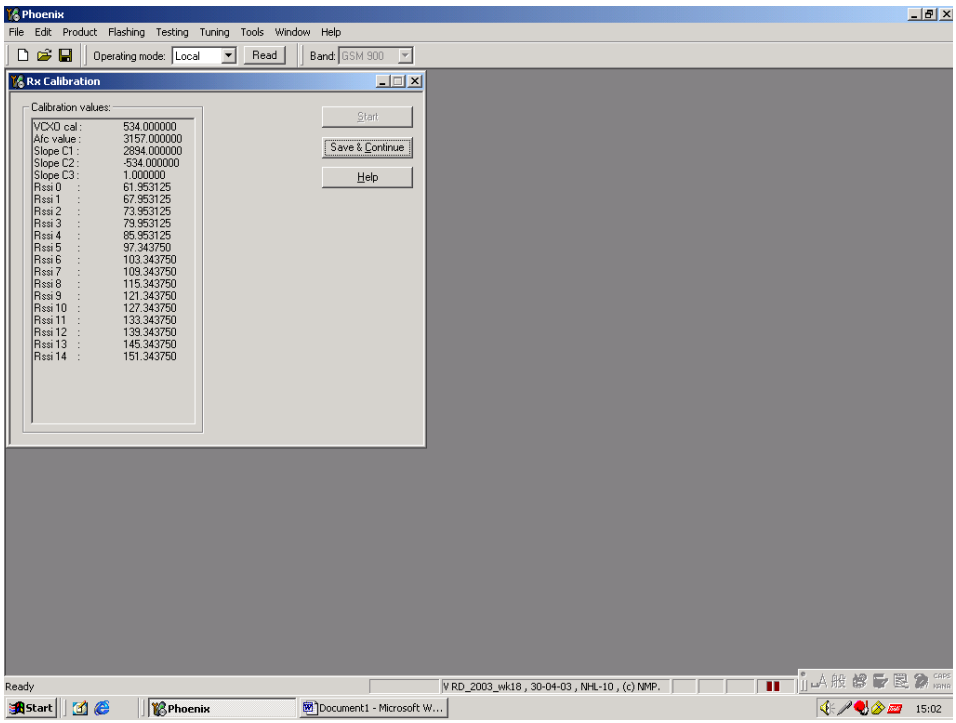

- Press Save & Continue.

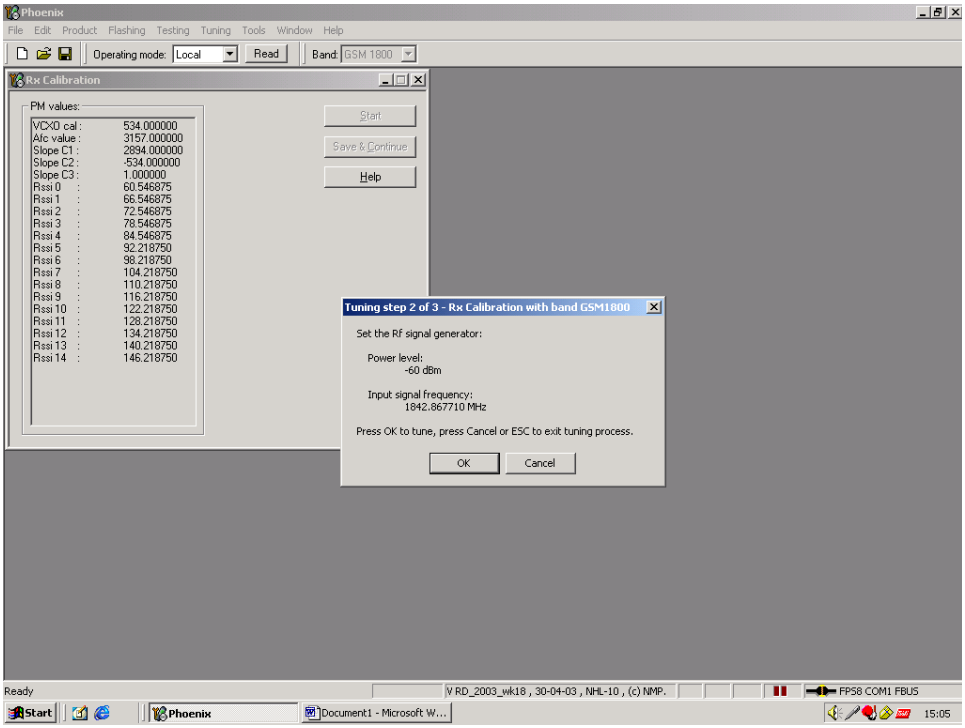

- Press OK and continue.

For GSM1900 just repeat the same procedure as for GSM900/GSM1800. If the calibration is OK, you should see “RX calibration was completed successfully” on the display.

Copyright © 2003 Nokia. All Rights Reserved.

RX Band Filter Response Compensation

The Rx Band Filter Response Compensation has nine steps for each band.

The RF Band Filter Response Compensation requires an external signal generator.

- Select Tuning -> RX Band Filter Response Compensation.

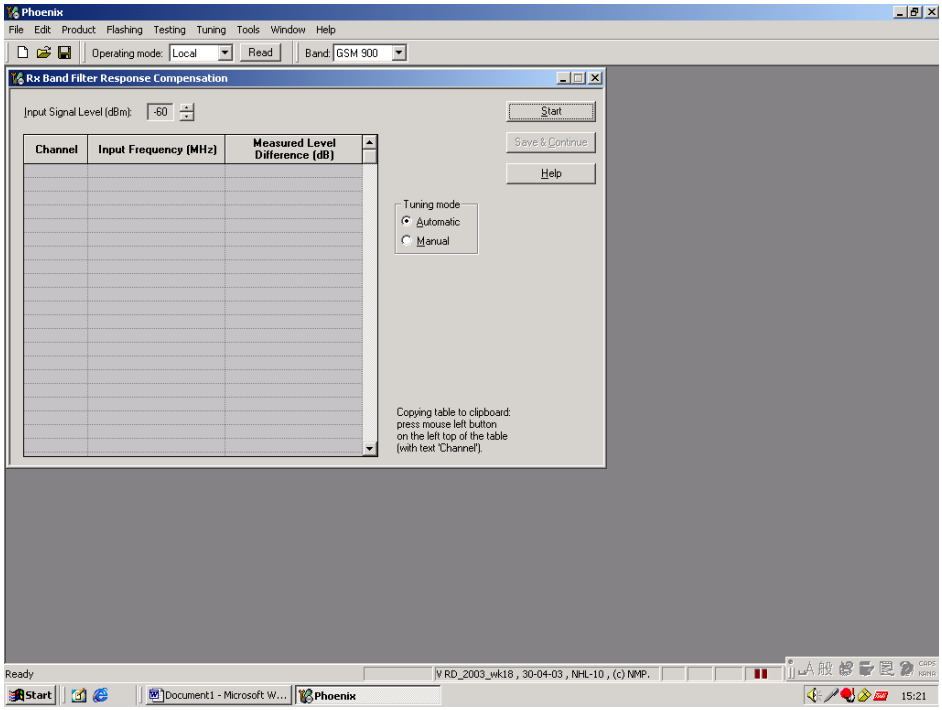

- Select Manual.

Copyright © 2003 Nokia. All Rights Reserved.

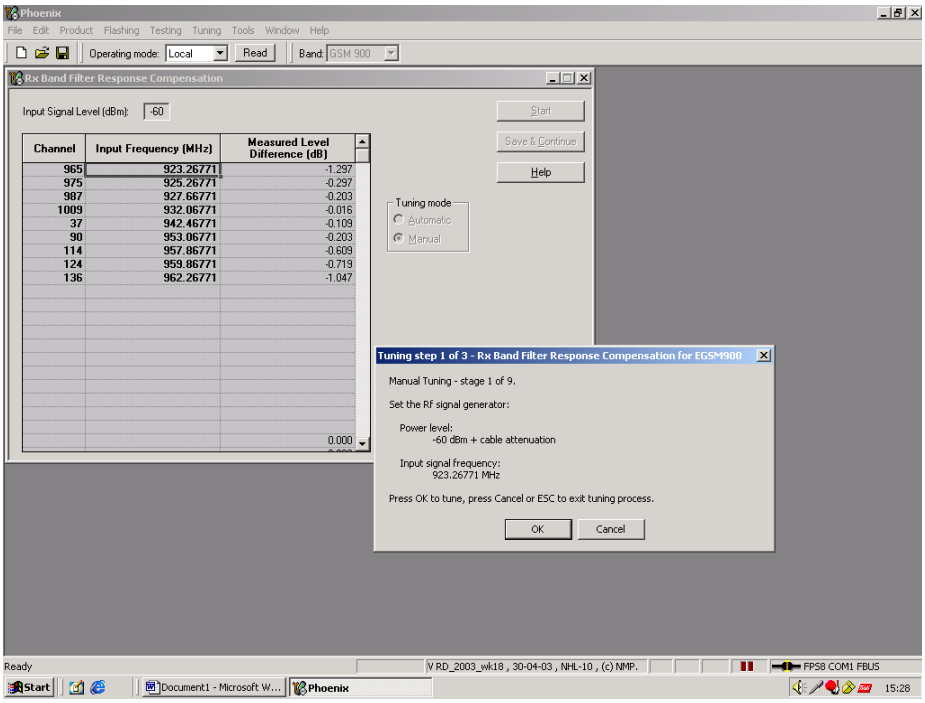

- Follow the instructions given in the following pop-up window. There are nine steps in all.
- After completing the nine steps of calibration at nine frequencies, press Save & Continue.

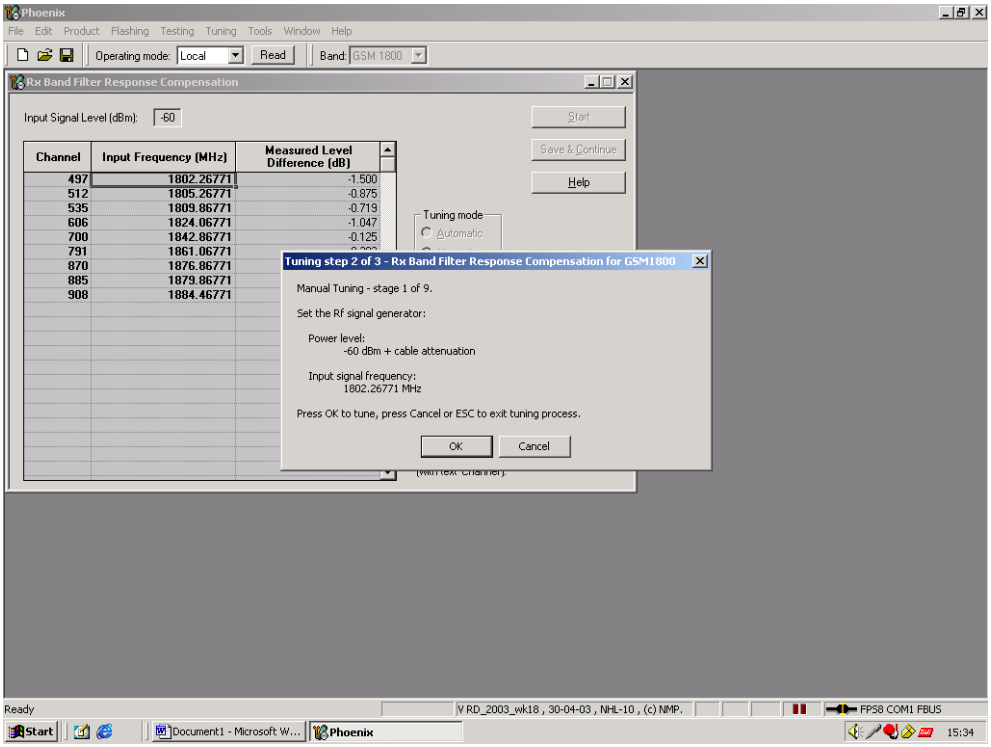

Copyright © 2003 Nokia. All Rights Reserved.

Repeat all steps as for GSM900 for the GSM1800 band. Follow all the instructions in the pop-up window. Repeat the procedure for GSM1900.

The tuning is completed.

Copyright © 2003 Nokia. All Rights Reserved.

Transmitter Troubleshooting

General Description

A simple block diagram of the TX part of the phone is shown in the following figure. The voice or data signals to be transmitted come from the UEME IC in the BB (Base Band) area, and go to the Mjølner IC, where they are up-converted to RF. The TX signals going from UEME to Mjølner are called the IQ signals, and consist of two balanced signals { TXIN, TXIP } and { TXQN, TXQP }, i.e. a total of four signal lines. In addition to the IQ-signals, there are also control signals going between BB and RF.

Figure 1: TX RF Block Diagram

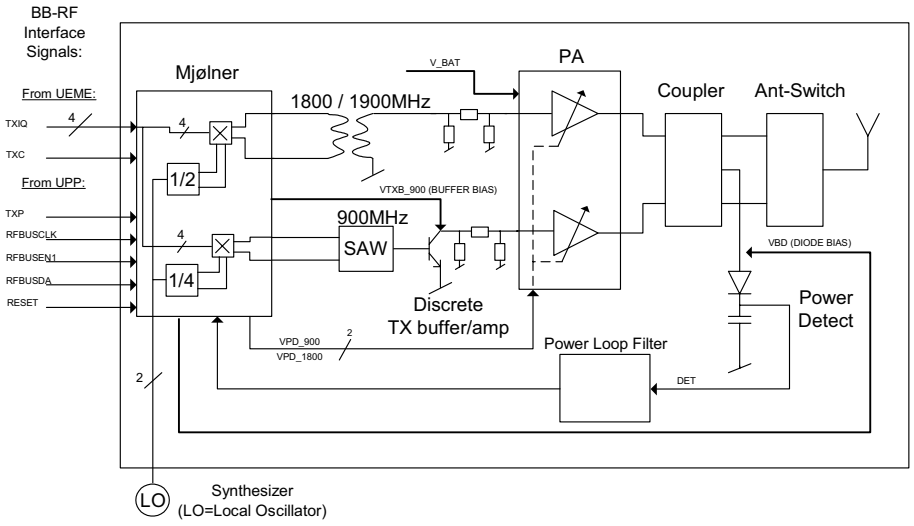

The picture below shows the two shielding cans where the TX circuitry is located (the lid has been removed). The shielding can on the right side contains BB-RF interface circuitry, the Mjølner RF system IC, a SAW filter for the EGSM band, and a balun for the DCS/PCS band. The shielding can on the left side contains the power amplifier (PA), the EGSM pre-amplifier, the directional coupler, the power detector, and the Antenna Switch Module (ASM).

Copyright © 2003 Nokia. All Rights Reserved.

Figure 2: GSM RF area

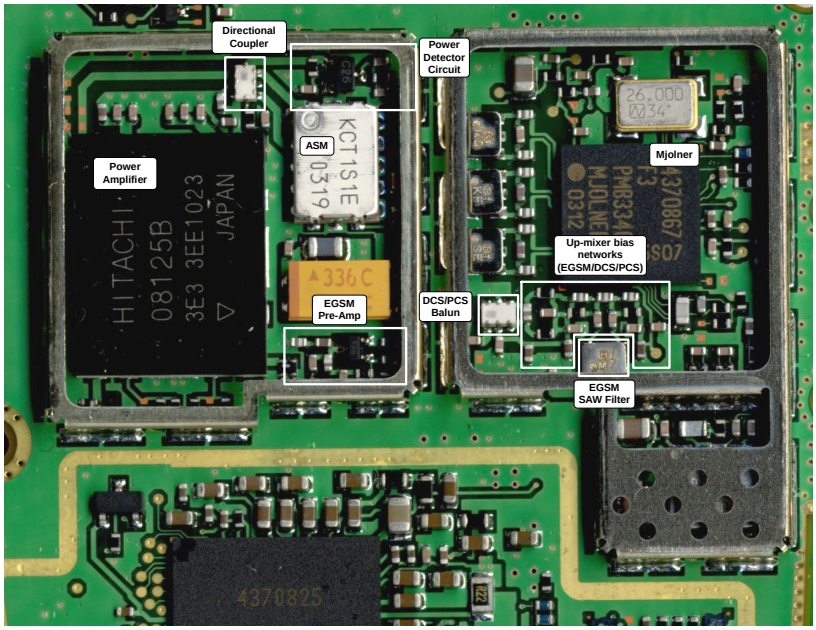

Preparation for Fault Finding

1 Place phone (mechanics removed) on module jig.

2 Connect the module jig to the PC via a DAU-9S cable.

3 Connect the module jig to the power supply (4.2V).

4 Connect the RF output to a spectrum analyzer or another measurement instrument.
Use a 10dB attenuator at the input to spectrum analyzer to avoid damaging it.

5 Make sure the dongle is connected and start Phoenix.

6 In Phoenix, select **File -> Open Product -> NHL-10 6600 Product Menu**.

7 Select **Testing -> RF Controls**.

8 From the toolbar, set **Operating Mode** to **Local**.

9 Select band: **GSM900**, **GSM1800** or **GSM1900**.

10 Set **Operation Mode** to **Burst**.

11 Set **Active Unit** to TX.

12 Set TX **Data Type** to **All1**.

Copyright © 2003 Nokia. All Rights Reserved.

13 Set RX/TX Channel to 37 for GSM900, 700 for GSM1800 or 661 for GSM1900.

14 Set TX PA Mode to Free.

15 Set TX Power Level to 5 in GSM900, otherwise to 0.

Phoenix should now look as shown in the following figure.

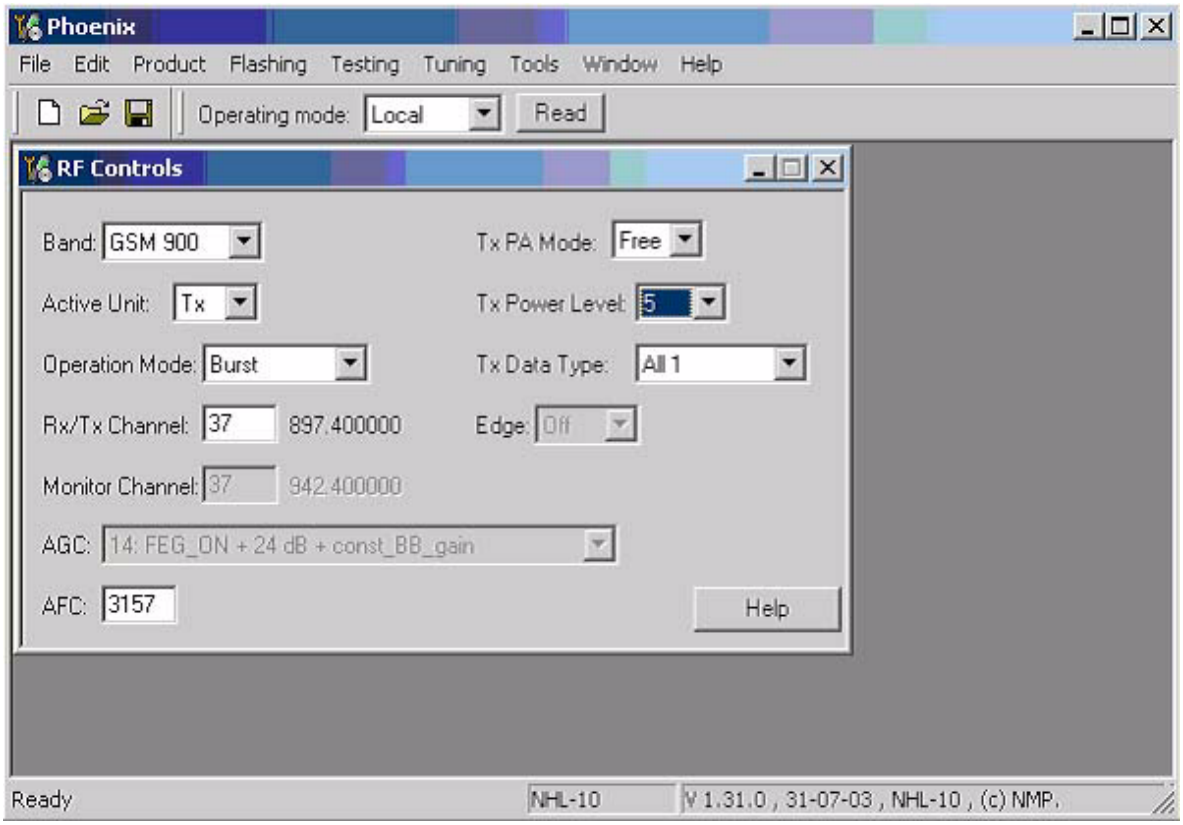

Copyright © 2003 Nokia. All Rights Reserved.

Fault-finding chart: TX-BB interface and control signals

Figure 3: Fault finding chart of BB-TX interface & some control signals

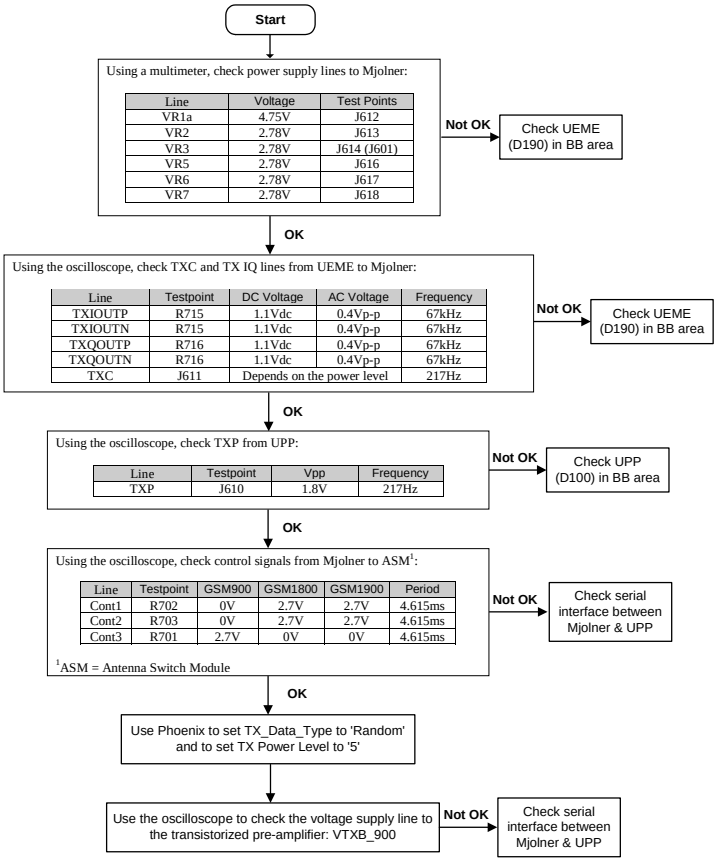
Start
Using a multimeter, check power supply lines to Mjolner:
Line | Voltage | Test Points
VR1a | 4.75V | J612
VR2 | 2.78V | J613
VR3 | 2.78V | J614 (J601)
VR5 | 2.78V | J616
VR6 | 2.78V | J617
VR7 | 2.78V | J618
Not OK
Check UEME (D190) in BB area
OK
Using the oscilloscope, check TXC and TX IQ lines from UEME to Mjolner:
Line | Testpoint | DC Voltage | AC Voltage | Frequency
TXIOUTP | R715 | 1.1Vdc | 0.4Vp-p | 67kHz
TXIOUTN | R715 | 1.1Vdc | 0.4Vp-p | 67kHz
TXQOUTP | R716 | 1.1Vdc | 0.4Vp-p | 67kHz
TXQOUTN | R716 | 1.1Vdc | 0.4Vp-p | 67kHz
TXC | J611 | Depends on the power level | | 217Hz
Not OK
Check UEME (D190) in BB area
OK
Using the oscilloscope, check TXP from UPP:
Line | Testpoint | Vpp | Frequency
TXP | J610 | 1.8V | 217Hz
Not OK
Check UPP (D100) in BB area
OK
Using the oscilloscope, check control signals from Mjolner to ASM[1]:
Line | Testpoint | GSM900 | GSM1800 | GSM1900 | Period
Cont1 | R702 | 0V | 2.7V | 2.7V | 4.615ms
Cont2 | R703 | 0V | 2.7V | 2.7V | 4.615ms
Cont3 | R701 | 2.7V | 0V | 0V | 4.615ms
[1]ASM = Antenna Switch Module
Not OK
Check serial interface between Mjolner & UPP
OK
Use Phoenix to set TX_Data_Type to 'Random' and to set TX Power Level to '5'
Use the oscilloscope to check the voltage supply line to the transistorized pre-amplifier: VTXB_900
Not OK
Check serial interface between Mjolner & UPP

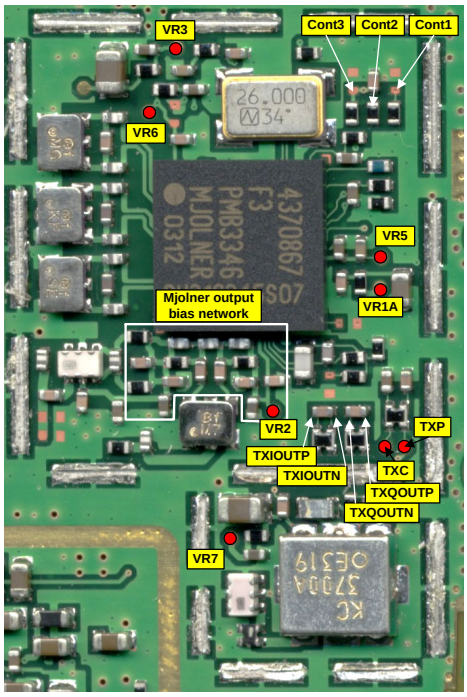

Figure 4: Oscilloscope screen shots

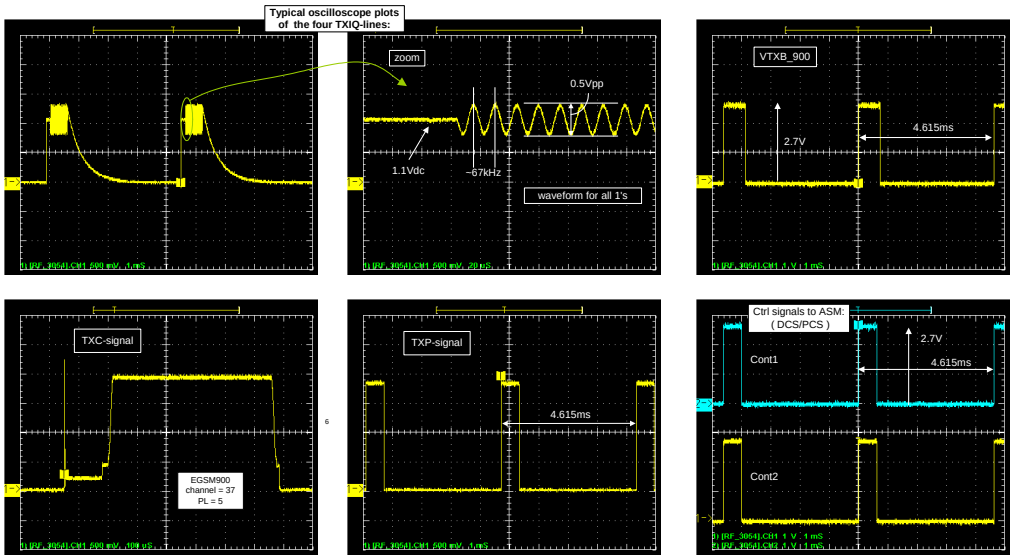

Copyright © 2003 Nokia. All Rights Reserved.

Fault-finding chart: RF side of transmitter

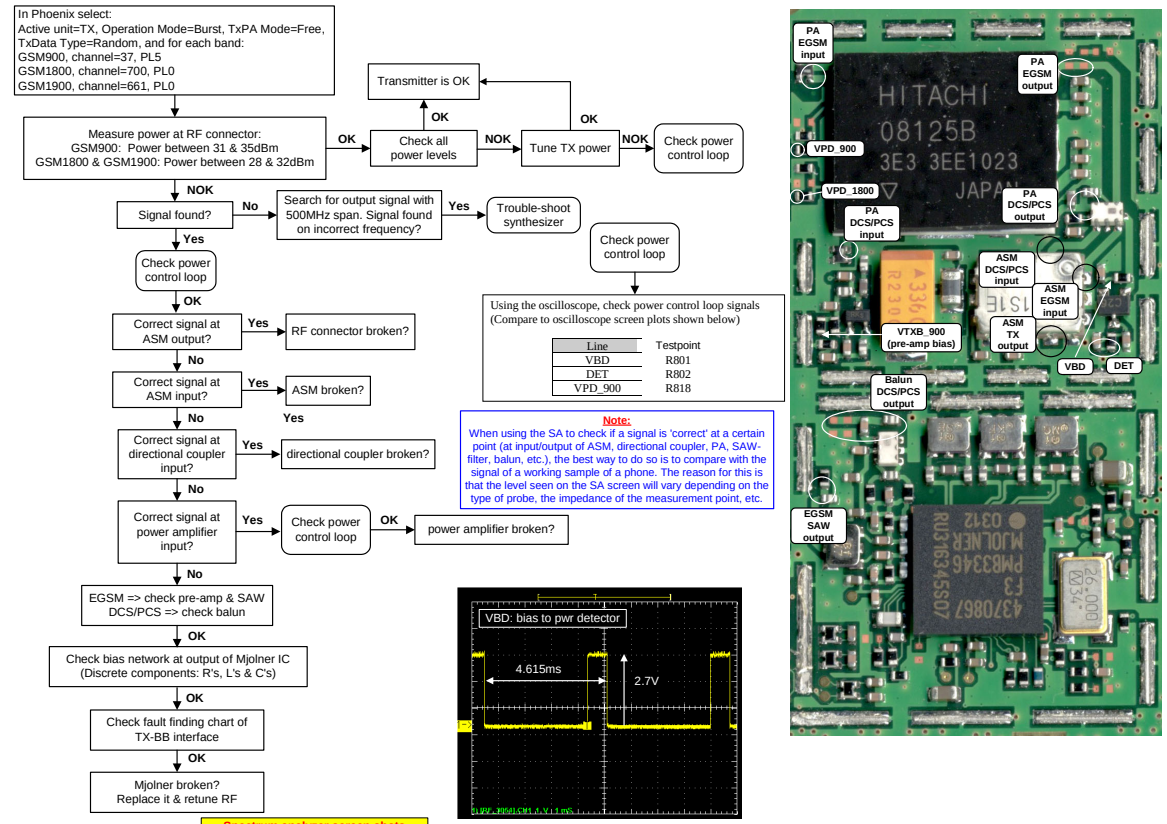
In Phoenix select:
Active unit=TX, Operation Mode=Burst, TxPA Mode=Free,
TxData Type=Random, and for each band:
GSM900, channel=37, PL5
GSM1800, channel=700, PL0
GSM1900, channel=661, PL0
Measure power at RF connector:
GSM900: Power between 31 & 35dBm
GSM1800 & GSM1900: Power between 28 & 32dBm
Transmitter is OK
Check all power levels
Tune TX power
Check power control loop
OK
NOK
Signal found?
No
Search for output signal with 500MHz span. Signal found on incorrect frequency?
Yes
Trouble-shoot synthesizer
Check power control loop
Using the oscilloscope, check power control loop signals (Compare to oscilloscope screen plots shown below)
Line
Testpoint
VBD
R801
DET
R802
VPD_900
R818
Correct signal at ASM output?
RF connector broken?
Correct signal at ASM input?
ASM broken?
Correct signal at directional coupler input?
directional coupler broken?
Correct signal at power amplifier input?
Check power control loop
power amplifier broken?
EGSM => check pre-amp & SAW
DCS/PCS => check balun
Check bias network at output of Mjolner IC
(Discrete components: R's, L's & C's)
Check fault finding chart of TX-BB interface
Mjolner broken?
Replace it & retune RF
Note:
When using the SA to check if a signal is 'correct' at a certain point (at input/output of ASM, directional coupler, PA, SAW-filter, balun, etc.), the best way to do so is to compare with the signal of a working sample of a phone. The reason for this is that the level seen on the SA screen will vary depending on the type of probe, the impedance of the measurement point, etc.
PA EGSM input
PA EGSM output
VPD_900
VPD_1800
PA DCS/PCS input
PA DCS/PCS output
ASM DCS/PCS input
ASM EGSM input
ASM TX output
VTXB_900 (pre-amp bias)
VBD
DET
Balun DCS/PCS output
EGSM SAW output
VBD: bias to pwr detector
4.615ms
2.7V
Spectrum analyzer screen shots
Measurements done at RF connector
EGSM900 channel = 37 PL = 5
Marker
897.400000 MHz
31.78 dBm
Span = 3MHz
Marker
500.0000000 µs
31.77 dBm
Span = 0Hz
DET: output of pwr detector
GSM900, PL=5
VPD_900: input voltage ctrl signal to PA
GSM900, PL=5

Copyright © 2003 Nokia. All Rights Reserved.

Transmitter Tuning

Introduction

In the transmitter, there are two kinds of tunings that can be performed. These are IQ-tuning and power level tuning. In general, different repairs require different tunings. In order to decide which tuning is necessary after a repair, it is important to understand well the functionality of the repaired circuit. In general, it is recommended that if any TX component is changed, both these tunings are done.

Note: All tunings are done in local mode using Phoenix to control the phone.

TX IQ Tuning

The tuning must be carried out in all three bands. In addition to Phoenix, a spectrum analyzer (SA) is needed. Connect the SA to the RF connector of the module jig. The settings of the spectrum analyzer will depend on the band to be tuned. The following table summarizes the settings for each of the three bands.

Table 1: Spectrum Analyzer Settings

	EGSM900	GSM1800	GSM1900
Center frequency	897.4MHz	1747.8MHz	1880MHz
Frequency span	300kHz	300kHz	300kHz
Resolution Bandwidth	3kHz	3kHz	3kHz
Video Bandwidth	3kHz	3kHz	3kHz
Sweep Time	3 sec	3 sec	3 sec
Trace Type	Clear/Write	Clear/Write	Clear/Write
Detector Type	Max Peak	Max Peak	Max Peak
Reference Level	35dBm	35dBm	35dBm
Marker 1	897.33229 MHz	1747.73229 MHz	1879.93229 MHz
Marker 2	897.4MHz	1747.8MHz	1880MHz
Marker 3	897.46771MHz	1747.86771MHz	1880.06771MHz

For this tuning, two windows of Phoenix must be open: (1) **Testing** -> **RF Controls**, and (2) **Tuning** -> **TX IQ Tuning**, as seen in figures below.

Copyright © 2003 Nokia. All Rights Reserved.

Figure 1: Phoenix set-up

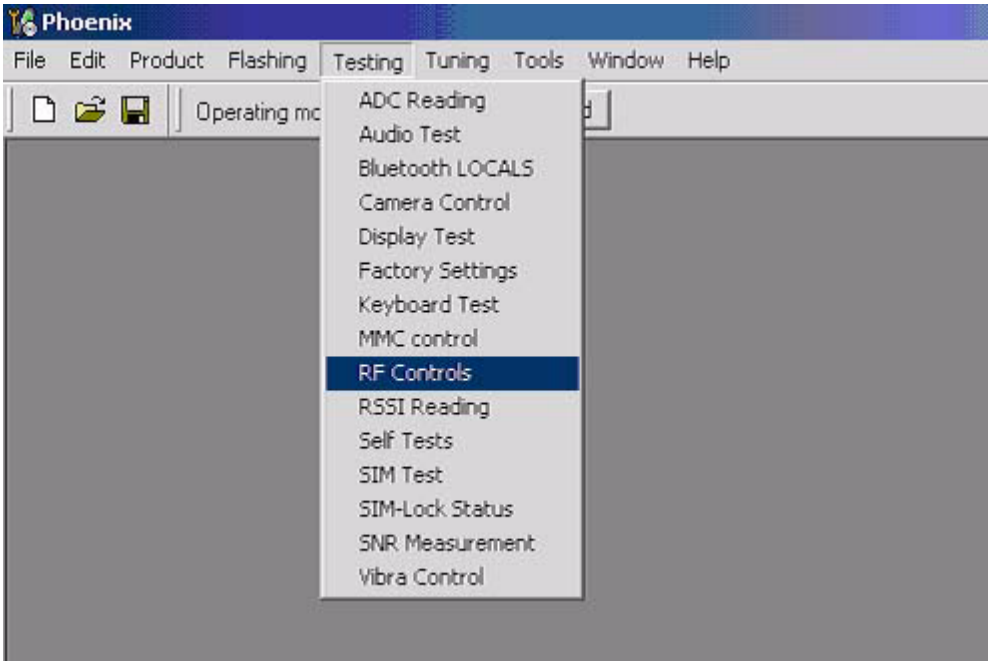

Figure 2: Phoenix set-up

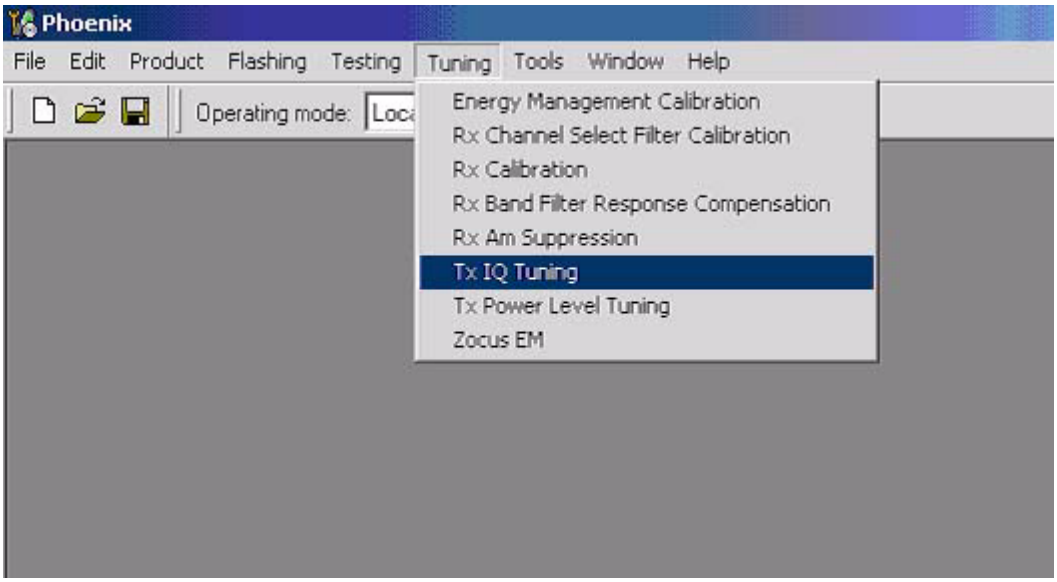

After opening the two before-mentioned windows, Phoenix should look as shown in the following figure.

Copyright © 2003 Nokia. All Rights Reserved.

Figure 3: Phoenix set-up

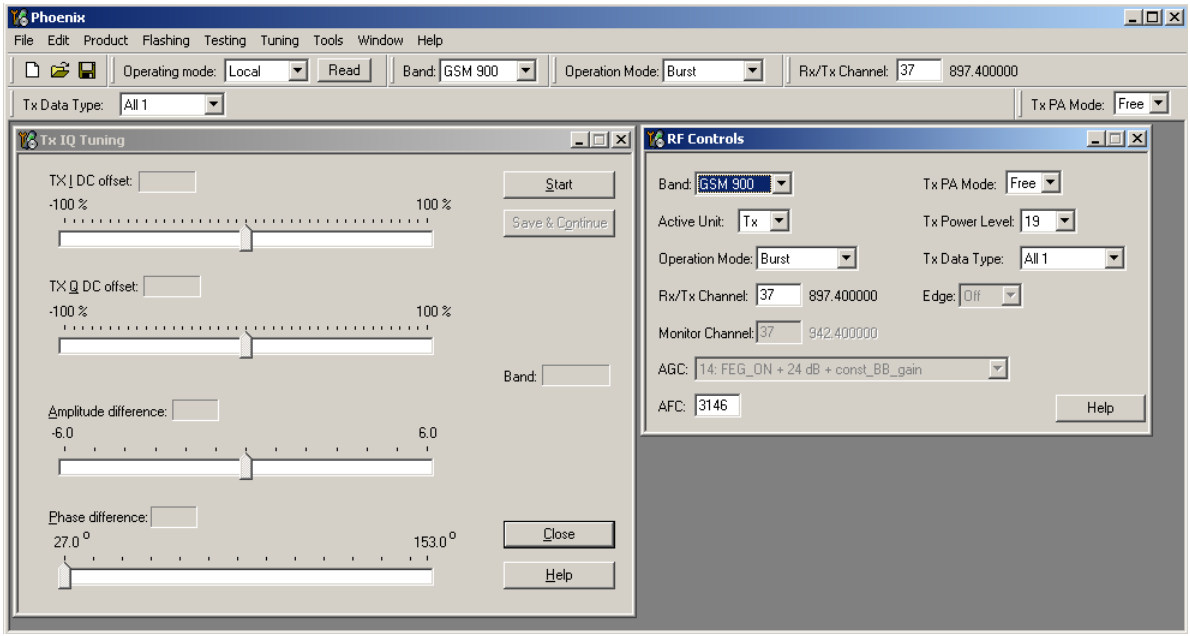

The following table summarises the settings of the RF control window for the IQ tuning of the three bands.

Table 2: RF Control Window Settings

Band	TX Data Type	TX Power Level	RX/TX Channel
GSM900	All 1	5	37
GSM1800	All 1	0	700
GSM1900	All 1	0	661

To start the IQ tuning, press **Start** in the **IQ Tuning** window.

Copyright © 2003 Nokia. All Rights Reserved.

The spectrum analyzer screen should now look similar to that of the figure below (GSM900 case).

Figure 4: Spectrum analyzer screen shot when performing IQ tuning

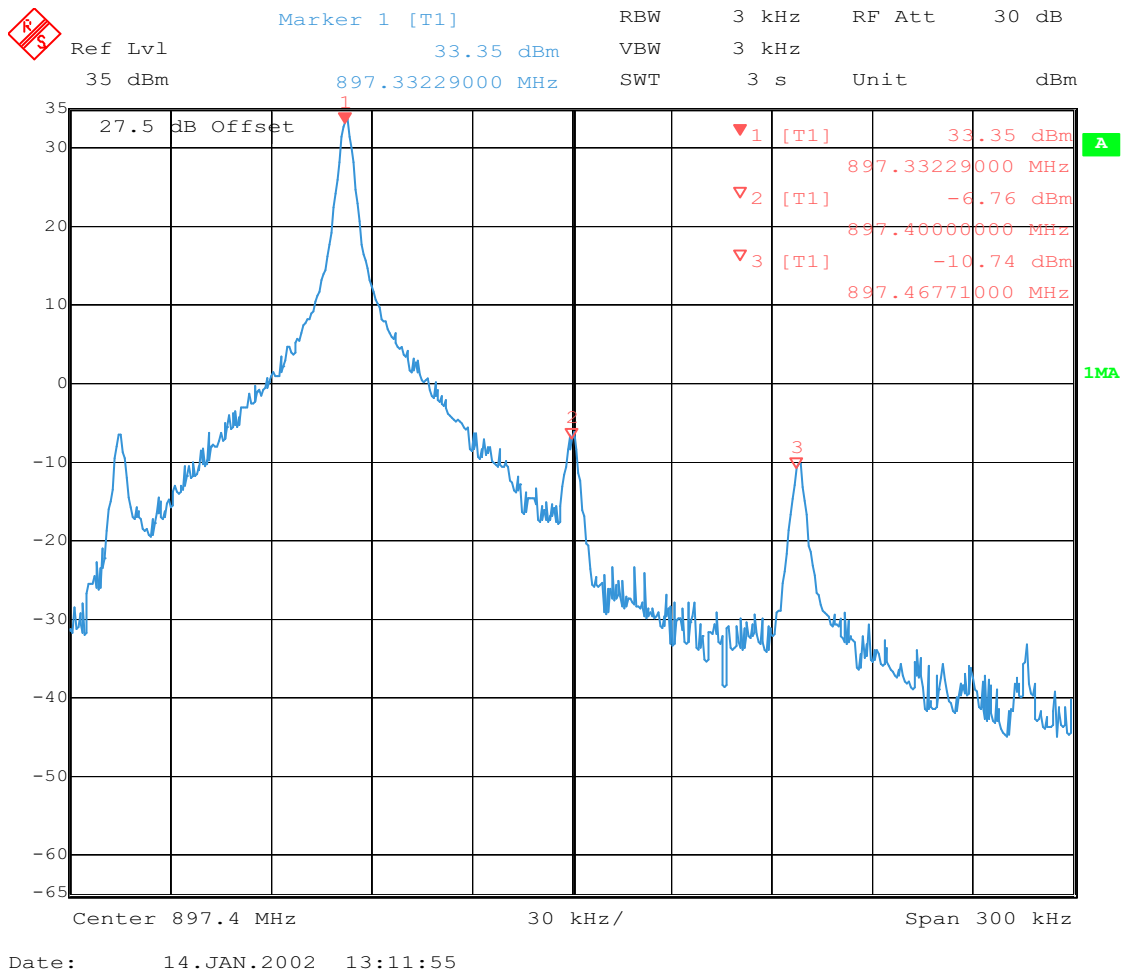

The purpose of this tuning is to reduce the frequency components at marker 2 (carrier leakage) and marker 3 (+67kHz / upper sideband) as much as possible. Adjust the **TXI DC Offset** and the **TXQ DC Offset** buttons in the TX IQ Tuning window so that the carrier level (marker 2) reaches a minimum. After this adjustment, the carrier (marker 2) should be at least 40dB below the lower side band (marker 1).

Next, use the **Amplitude difference** and the **Phase difference** buttons in the **TX IQ Tuning** window to adjust the upper side band (marker 3) to a minimum. Now, marker 3 should also be at least 40dB below marker 1.

At this point, the spectrum analyzer screen should look similar to that of the figure below.

Copyright © 2003 Nokia. All Rights Reserved.

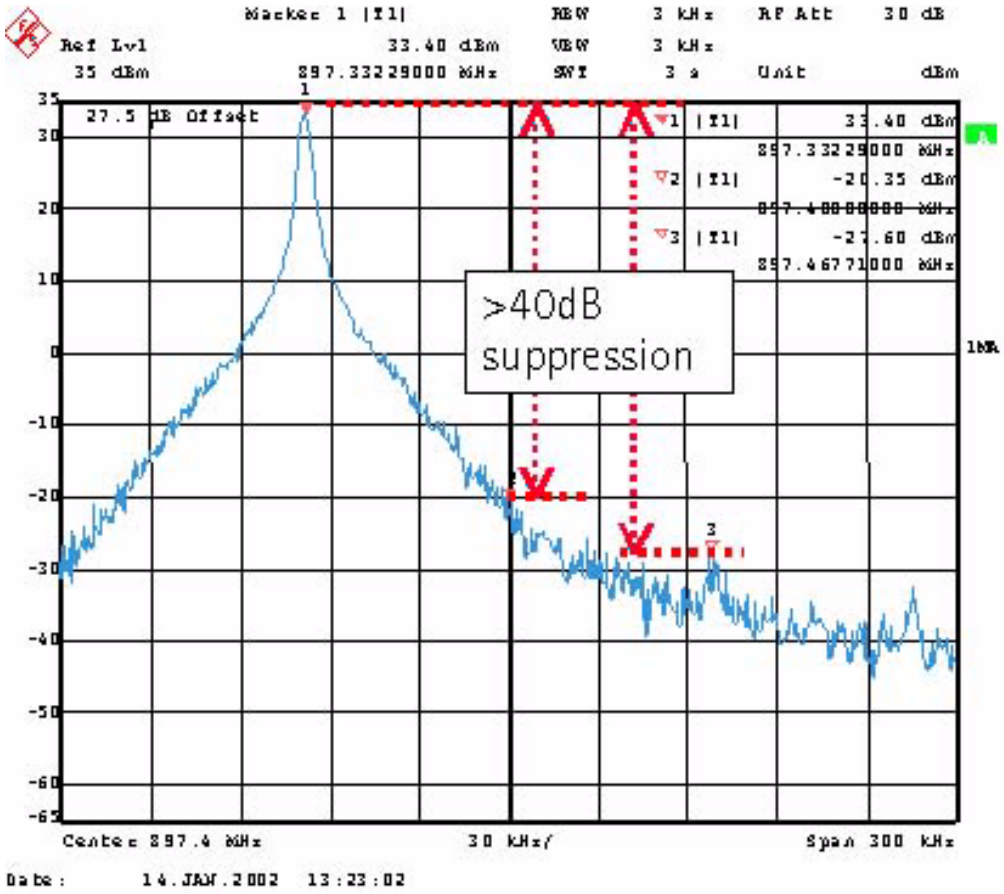

After reducing the amplitude of the frequency components at marker 2 and 3 to a minimum, press **Save & Continue**. The EGSM tuning has now been completed.

Now, using the spectrum analyzer settings of Table 1, and the RF control settings of Table 2, follow exactly the same procedure to perform IQ tuning in the GSM1800 and GSM1900 bands.

TX Power Level Tuning

This tuning is done separately in all three bands, and requires a spectrum analyzer to measure the burst power of the GSM RF signal. When measuring the RF output (burst) power on a spectrum analyzer, use the settings found in the following table:

Copyright © 2003 Nokia. All Rights Reserved.

Table 3: Spectrum Analyzer Settings

	EGSM900	GSM1800	GSM1900
Center frequency	897.4MHz	1747.8MHz	1880MHz
Frequency span	Zero-span	Zero-span	Zero-span
Resolution Bandwidth	1MHz	1MHz	1MHz
Video Bandwidth	1MHz	1MHz	1MHz
Sweep Time	1ms	1ms	1ms
Trigger Type	Video	Video	Video
Trace Type	Clear/Write	Clear/Write	Clear/Write
Detector Type	Max Peak	Max Peak	Max Peak

In Phoenix, select **Tuning** -> **TX Power Level Tuning**.

Figure 5: Phoenix menu select

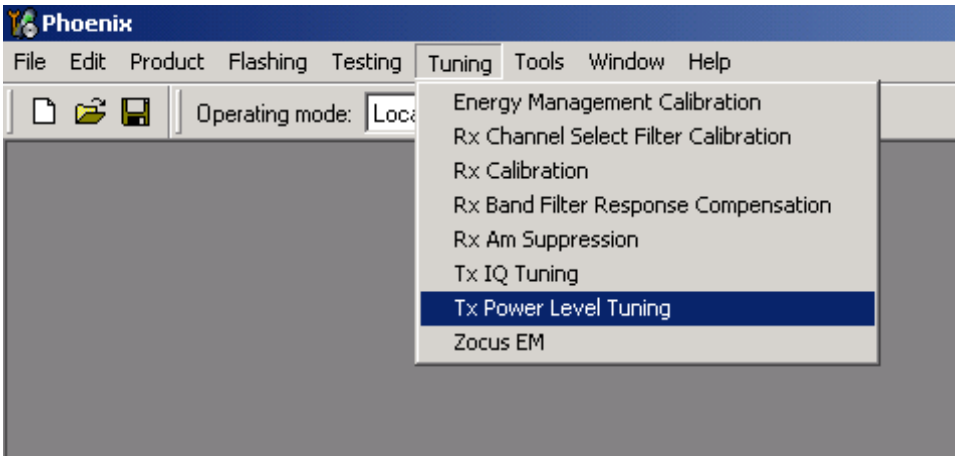

Phoenix should now as shown in the figure below.

Copyright © 2003 Nokia. All Rights Reserved.

Figure 6: Phoenix power level tuning menu

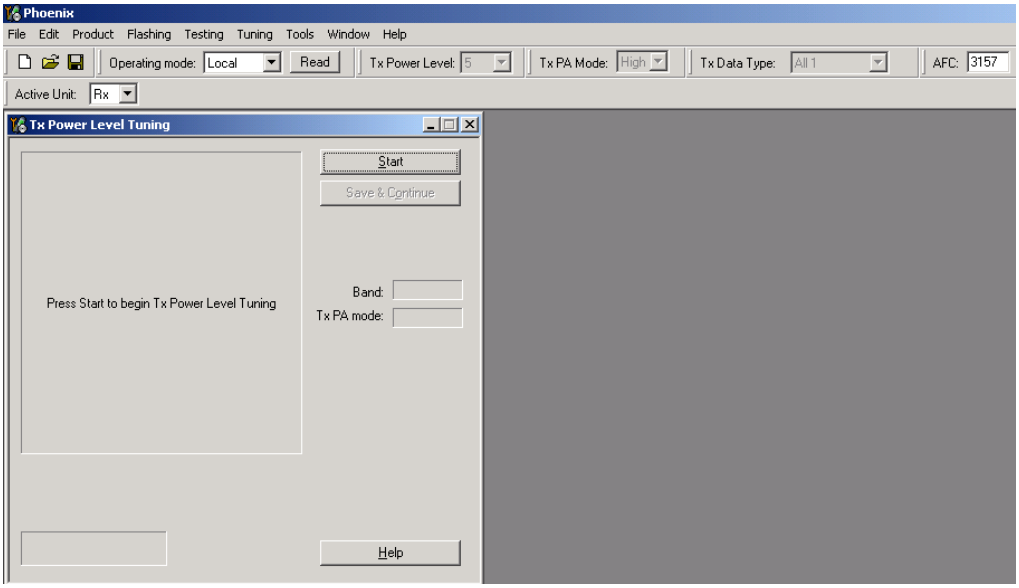

Connect the module jig RF output to the measurement instrument. In the EGSM band the power must be tuned in both high and low TX PA mode. In the two upper bands (GSM1800 and GSM1900) there is only one mode.

For each band, tune the power by adjusting the coefficient in the **Tx Power Level Tuning** window in Phoenix until the target level is reached (measured on the spectrum analyzer). Remember to take into account the external power loss, i.e. the loss of the cable and the external attenuator at the spectrum analyzer input. The coefficient must be tuned for the base level and other levels, marked with bold letters in Phoenix (GSM900: PL19/15/7/5, GSM1800/1900: PL15, 11, 0).

When the tuning has been completed, press **Save & Continue** to save the new tuning values into the phone memory.

The following figure shows the power level tuning at the GSM900 band.

Copyright © 2003 Nokia. All Rights Reserved.

Figure 7: Phoenix screen shot

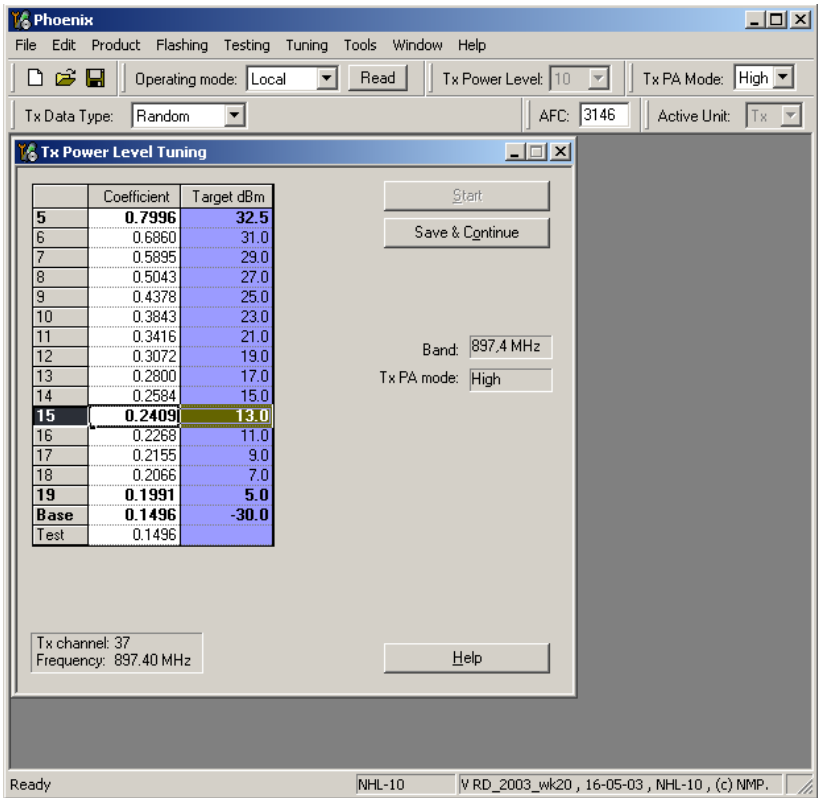

The next figure shows the spectrum analyzer screen shot associated with the above Phoenix screen shot.

Figure 8: Spectrum analyzer screen short during power level tuning

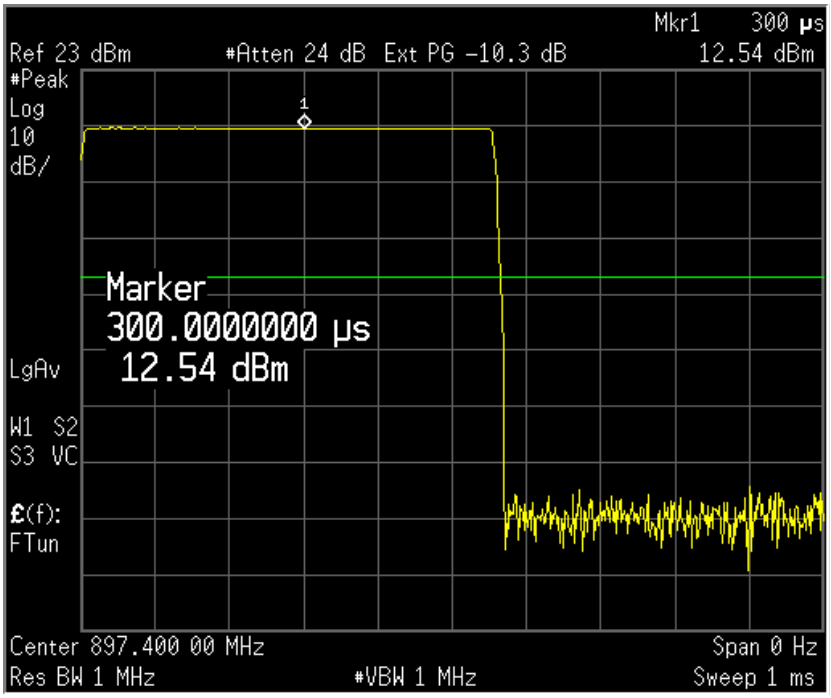

Copyright © 2003 Nokia. All Rights Reserved.

This page has been deliberately left blank

Copyright © 2003 Nokia. All Rights Reserved.